


ALL PSU DATA SHEET

150 Watt RS Series, (Single Output)

- * Miniature Size, High Power Density.
- * Protections : Short Circuit / OLP / OVP
- * Meet EMS EN50082-2 / EN61000-6-2 Heavy Industrial Level (35-150W)
- * Withstand 300 VAC Surge Input For 5 Seconds
- * High Operating Temperature Up To 70 * C
- * Withstand 5G Vibration Test
- * High Efficiency, Long Life And High Reliability
- * 100% Full Load Burn-In Test
- * 3 Years Warranty
- * DIN Rail Mounting Kits Available.
- * Full Series Includes 1 to 4 Outputs up to 150 Watts

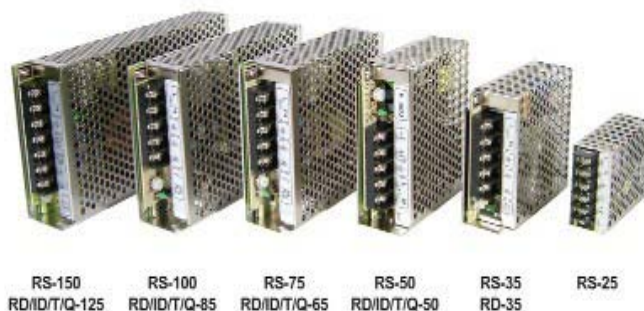

150 Watt Single Unit 199 x 98 x 38 mm (plus terminals)
(Picture also shows other units in range up to 150 Watts).

Specification

AC Input Voltage Range
AC Inrush Current (max)
DC Output Adjustment Range
Over Load Protection
Over Voltage Protection

Withstand Voltage

Working Temperature

Vibration

Safety Standards
EMC Standards

Connection
Dimensions (L*W*H)(mm)

115/230 VAC By Switch
Cold Start, 50A @ 230 VAC
+/- 10%
110%-150% Hiccup mode, auto recovery
115%-135% Rated Output Voltage, Hiccup Mode
Auto-Recovery
I/P-O/P : 3K VAC, I/P-F/G : 1.5K VAC
O/P-F/G : 0.5K VAC, 1 Minute
-20 to +70°C (refer to derating curve for different models), -40°C Start-Up Possible
10-500Hz, 5G 10min/1 cycle, period for 60min each along X, Y, Z Axes.
UL60950-1, TUV EN60950-1 Approved
EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,8,11 ENV50204
EN61000-6-2 (EN500082-2) (35-150W)
Terminal Block For Input And Output
199 x 98 x 38

Model	Output	Ripple/ Noise	Efficiency
RS-150-3.3	3.3V / 0-30A	80mV	75%
RS-150-5	5V / 0-26A	80mV	78%
RS-150-12	12V / 0-12.5A	120mV	83%
RS-150-15	15V / 0-10A	120mV	84%
RS-150-24	24V / 0-6.5A	120mV	86%
RS-150-48	48V / 0-3.3A	200mV	87%

For Full Specification & Mechanical Drawings Please Contact ALL PSU Sales Office.

*Other Single Output Enclosed Units Are Available From 25 to 2400 Watts, Please See Web Site At www.allpsu.co.uk or Contact ALL PSU Sales Office for Details
Alternative 150 Watt Units Are Also Available In The MK150S Series
In A Compact Case Size Of Only 152 x 89 x 45mm.*

Specifications May Change Without Notice, E&OE. ALL PSU Terms & Conditions Apply.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email : sales@allpsu.co.uk , Web : www.allpsu.co.uk