


ALL PSU DATA SHEET.

25 Watt S Series, (Single Output).

- Universal Input
- High Efficiency/Reliability
- 100% Full Load Burn In
- Short Circuit, Over Load, Over Voltage Protection
- Full Approvals : UL/TUV/CE
- 2 Year Warranty
- Compact size, light weight
- Built EMI in filter, low ripple noise

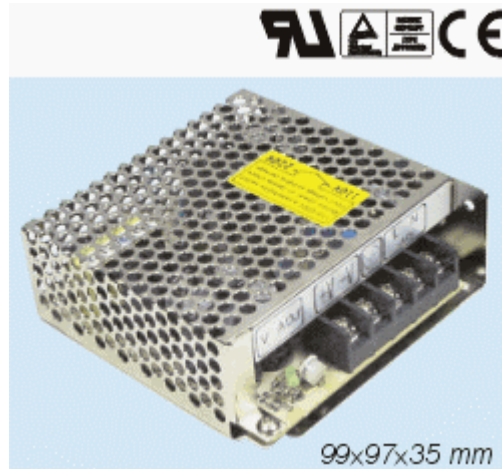

Specification

Input Voltage	85~264 VAC, 47~63Hz, 120~370 VDC
Inrush current	Cold Start, 15A/ 115, 30A/ 230V
Output Voltage	See Table Below (plus adjustment range)
Over Load Protection	105~150% Output pulsing mode
Over Voltage Protection	115~135% Of Output Voltage
Setup, Rise, Hold up time	800ms, 50ms, 10ms/ 115VAC 300ms, 50ms, 80ms/ 230VAC
Withstand Voltage	I/P-O/P : 3KV, I/P-FG:1.5KV, 1Min
Operating Temperature	0-50°C @ 100%, -10°C @ 80%, 60°C @ 60%
Safety Standards	TUV EN60950, UL1012
EMC Standard	(EN55022), IEC801-2,3,4, IEC555-2

DIN Rail Mounting Accessories Are Available For This Range.

Further Single Output Units Are Available Up To 2400 Watts.

Model	Output	Ripple/Noise	Efficiency
S-25-5	5V / 5A	50mV	72%
S-25-12	12V / 2.1A	100mV	76%
S-25-15	15V / 1.7A	100mV	77%
S-25-24	24V / 1.1A	100mV	80%

For full specification and mechanical drawing, please contact ALL PSU sales office.
Specifications can change without notice, E&OE. ALL PSU Terms & Conditions Apply.

A Full List Of Available Models Is Available At www.allpsu.co.uk

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk