

200 Watt, RSP-200 Series, Enclosed Power Supply

- Universal AC Input With PFC
- High Efficiency Up To 90%
- High Reliability, 3 Year Warranty
- Short Circuit, Over Voltage, Over Load, Over Temperature Protection
- Full Approvals : UL/CUL/TUV/CB/CE
- Cooling By Free Air Convection
- Conformal Coating Option
- Sub 1U Low Profile 30mm



Specification

Input Voltage.....	.88~264 VAC, 47~63 Hz (124-370 VDC)
Power Factor.....	0.95 @ 230 VAC, 0.98 @ 115 VAC
Output Voltage.....	See table below for Voltage models and adjustment range
Over Load Protection.....	105~135% O/P Hiccup Mode, Auto Recovery
Over Voltage Protection.....	Dependant on model, typically 135%
Set Up, Rise, Hold Up Time.....	typ 1500ms, 50ms, 8ms @ Full Load/230 VAC
Isolation Voltage.....	I/P-O/P: 3 kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC
Operating Temperature	-30 to +70 °C, see derating curve
Safety Standards.....	UL60950-1, TUV EN60950-1, CCC GB4943
EMC.....	EN55022, (CISPR22) Class B, EN61000-4-2,3,4,5,6,8,11 EN61000-3-2,3, EN55024, light industry level, criteria A GB9254 class B, GB17625.1
Mechanical Size & Weight.....	215 x 115 x 30 mm, 0.72 Kg
Connections Input & Output.....	Screw Terminals

Models and Ratings

Model	Output Voltage	Output Voltage Adj Range	Maximum Output Current	Efficiency
RSP-200-2.5	2.5 Volts	2.35 to 2.85 Volts	40 Amps	79.5 %
RSP-200-3.3	3.3 Volts	2.97 to 3.8 Volts	40 Amps	81.5 %
RSP-200-4	4 Volts	3.7 to 4.3 Volts	40 Amps	84 %
RSP-200-5	5 Volts	4.5 to 5.5 Volts	40 Amps	85.5 %
RSP-200-7.5	7.5 Volts	6 to 9 Volts	26.7 Amps	89 %
RSP-200-12	12 Volts	10 to 13.2 Volts	16.7 Amps	89 %
RSP-200-13.5	13.5 Volts	12 to 15 Volts	14.9 Amps	89 %
RSP-200-15	15 Volts	13.5 to 18 Volts	13.4 Amps	89.5 %
RSP-200-24	24 Volts	20 to 26.4 Volts	8.4 Amps	89.5 %
RSP-200-27	27 Volts	26 to 31.5 Volts	7.5 Amps	89. %
RSP-200-27	36 Volts	32.4 to 39.6 Volts	5.56 Amps	90 %
RSP-200-48	48 Volts	41 to 56 Volts	4.2 Amps	90 %

Please see next page for mechanical drawings, connections and derating.


**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
 Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
 Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk**

200 Watt, RSP-200 Series, Enclosed Power Supply




electronic powersolutions

Mechanical Drawings, (includes 4 x optional side mounting lugs).

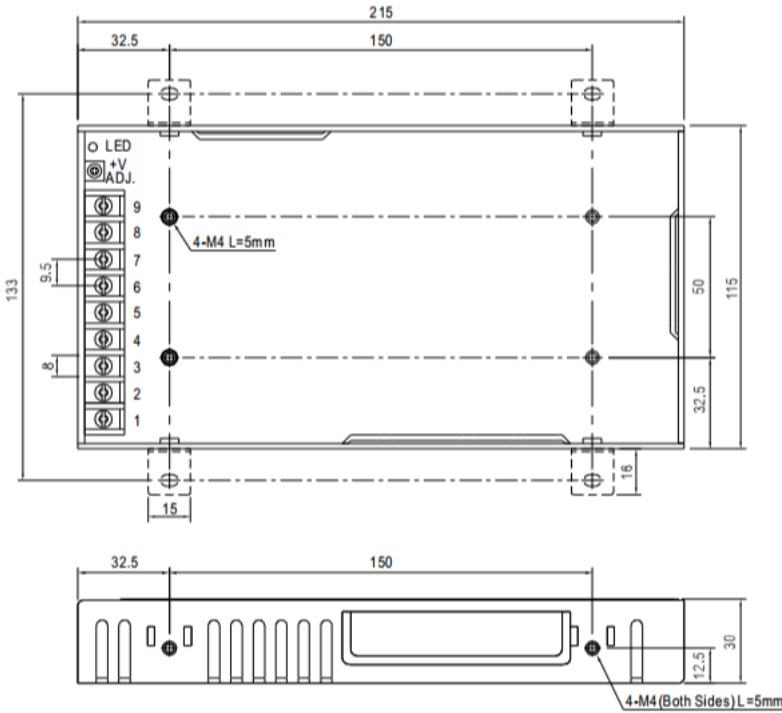

Connections	
Terminal	Function
1	AC Live
2	AC Neutral
3	Input Earth
4 - 6	-DC Out
7 - 9	+DC Out

Temperature and AC Input Derating Curves

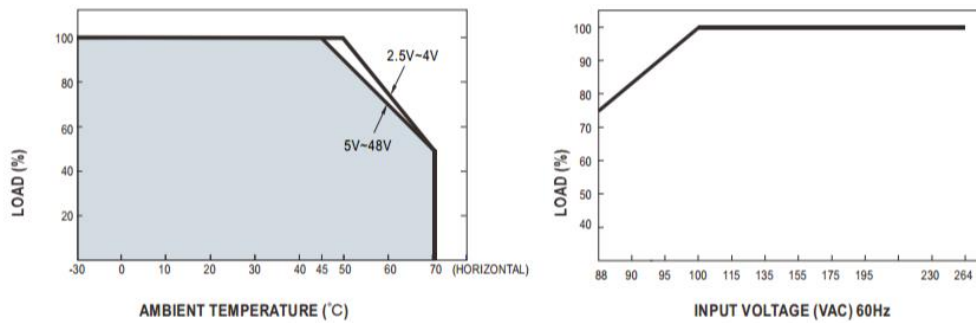

Specifications may change without notice. E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,
Email : sales@allpsu.co.uk Web : www.allpsu.co.uk**