


10 Watt, CFM10 Series, Open Frame (Single Output)



electronic powersolutions

- Universal AC Input 85-264 VAC
- Open Frame, PCB Mounting
- Full Approvals UL/TUV/CE
- Leakage Current 0.25mA Max
- Protected For Short Circuit / Over Voltage
- Miniature Footprint 65 x 45mm
- 2 Year Warranty

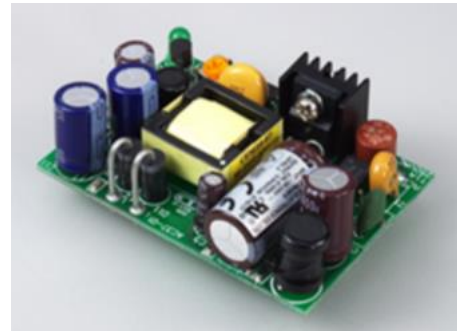



Specification

Input Voltage.....	85~264 VAC, 47~63 Hz
Inrush Current.....	40 A max @ 230 VAC
Output Voltage.....	See table below, plus Min +/-5% adjustment
Line Regulation.....	+/-0.5%
Load Regulation.....	+/- 1%
Operating Temperature.....	0°C to 70 °C, (See derating curve)
Storage Temperature.....	-20 °C to 85 °C
Safety Standards.....	UL60950-1, EN60950-1, IEC60950-1
EMC Standards.....	EN55022 Class B, EN61000-6-1,3, EN55024, EN61000-3-2,3 EN61204-3
Input / Output Connections	PCB mounting Pins
Dimensions.....	65(L) x 45(W) x 23(H) mm.
Weight.....	60g each

Models and Ratings

Model	Output Voltage	Output Current	Efficiency
CFM1007S	3.3 V	2.5 A	67%
CFM1001S	5 V	2 A	73%
CFM1009S	9 V	1.12 A	72%
CFM1002S	12 V	0.84 A	76%
CFM1003S	15 V	0.67 A	76%
CFM1005S	24 V	0.42 A	77%

Mechanical Details

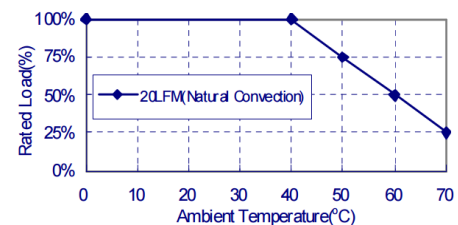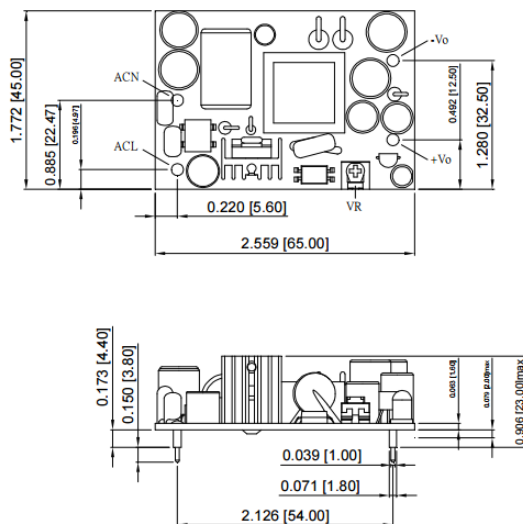

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions Apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk**