

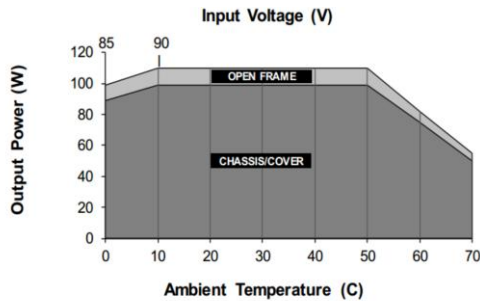
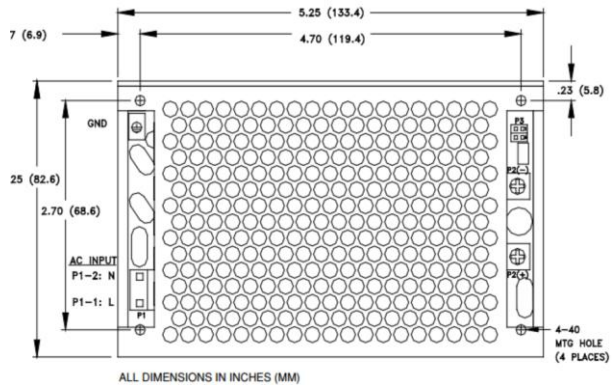
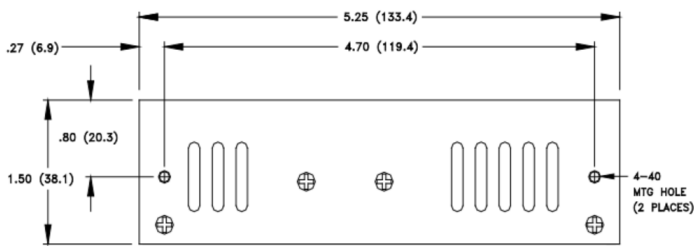


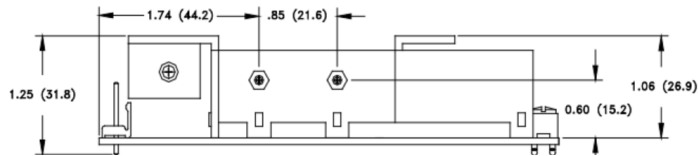

electronicpowersolutions

110 Watt GRN Series, Open Frame / Cased, Single Output

Mechanical Drawings & Connection Details

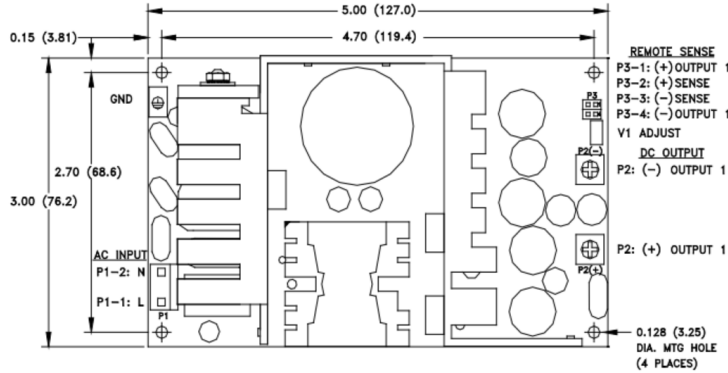

Derating requirements - Derate from 100% load at 50° C to 50% load at 70° C.
 - Derate from 100% load at 90 V_{IN} to 90% load at 85 V_{IN}.
 - Derate 10% with chassis and cover.

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions apply.

ALL PSU LTD

Unit D6 Laser Quay | Culpeper Close | Medway City Estate | Rochester | Kent

ME2 4HU Tel : 01634 725527 | Fax : 01634 739111

Email : sales@allpsu.co.uk | Web : www.allpsu.co.uk