

10 Watt, NFM Series, Open Frame (Single Output)

ALL PSU LTD
Electronic Power Solutions

- Universal AC Input
- Compact PCB Mounting Format
- Short Circuit, Overload, Over Voltage Over Temperature Protection
- High Reliability, 100% Burn In
- 3 Year Warranty
- Very Competitive Prices
- Full Safety Approvals Industrial & Medical



Size: 65 x 45 x 22 mm

Specification

Universal Input.....	85~264 VAC / 120~370 VDC
Frequency.....	47~440 Hz
Output Voltage.....	See table below, plus trim range
Over Load Protection.....	>105%, output hiccup mode, (auto-recovery)
Over Voltage Protection.....	Shuts off o/p voltage, clamping by zener diode
Set Up, Rise, Hold Up Time.....	1000 ms, 20 ms, 100 ms (230 VAC Input)
Isolation Voltage.....	I/P-O/P: 4 kVAC
Line Regulation.....	+/-1.0% (3.3~5 V models), +/-0.5% (12~24 V models)
Load Regulation.....	+/-1.0% (3.3~5 V models), +/-0.5% (12~24 V models)
AC Input Current.....	0.25 A @ 115 VAC, 0.15 A @ 230 VAC
Inrush Current.....	45A @ 230VAC (cold start)
Operating Temperature.....	-20 to +70°C (see derating curve)
Storage Temperature.....	-40 to +85 °C
Safety Standard.....	UL60601-1, TUV EN60601-1, IEC60601-1
EMC Standard.....	(CISPR11 & 22) EN55011 & 22 Class B EN61000-4-2, 3, 4, 5, 6, 8, 11 EN61000-3-2,3, ENV50204, EN55024, EN60601-1-2 EN61204-3 Medical Level, Criteria A.
Size	65 x 45 x 22 mm
Connection.....	PCB Mounting, for pin out see mechanical drawing



Models and Ratings

Model	Output Voltage	Output Current	Ripple/Noise	Efficiency
NFM-10-3.3	3.3 V	2.5 A	80 mV	66%
NFM-10-5	5.0 V	2 A	80 mV	74%
NFM-10-12	12.0 V	0.85 A	150 mV	78%
NFM-10-15	15.0 V	0.67 A	150 mV	79%
NFM-10-24	24.0 V	0.42 A	240 mV	79%


Please see next page for mechanical drawing and connection details.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email: sales@allpsu.co.uk Web: www.allpsu.co.uk**


Mechanical Details, (Top view)

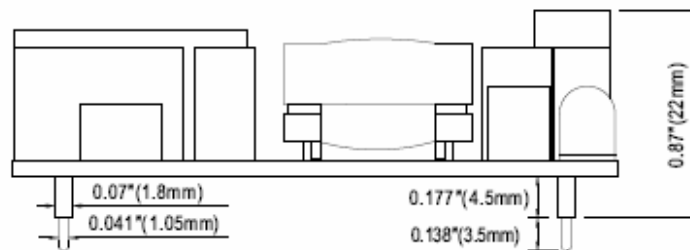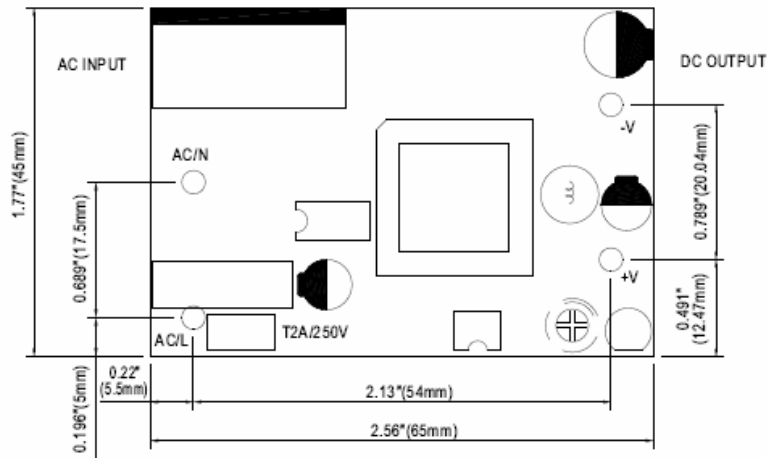

Derating Curve

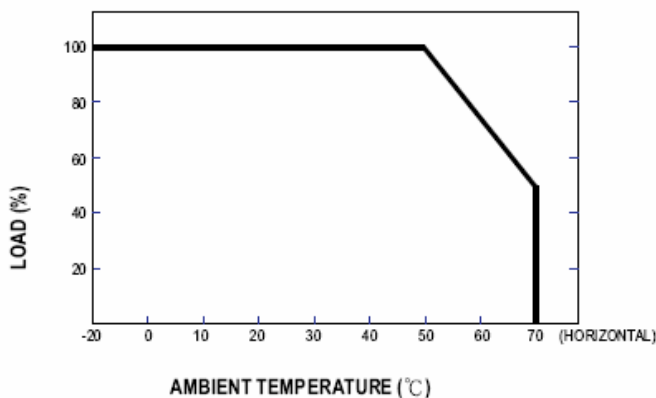

Output Derating VS Input Voltage

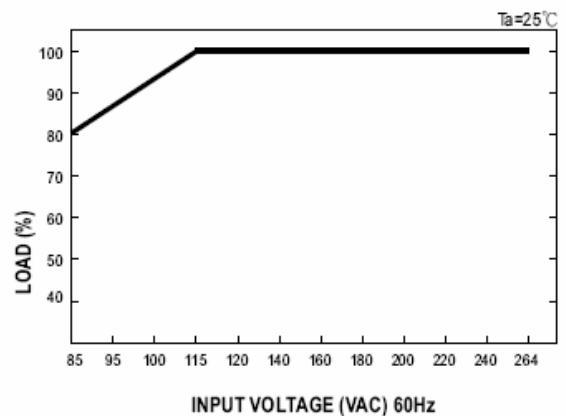

Specifications may change without notice, E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email: sales@allpsu.co.uk Web: www.allpsu.co.uk**