


ALL PSU DATA SHEET.

25 Watt Open Frame Series, (Dual Output Models).

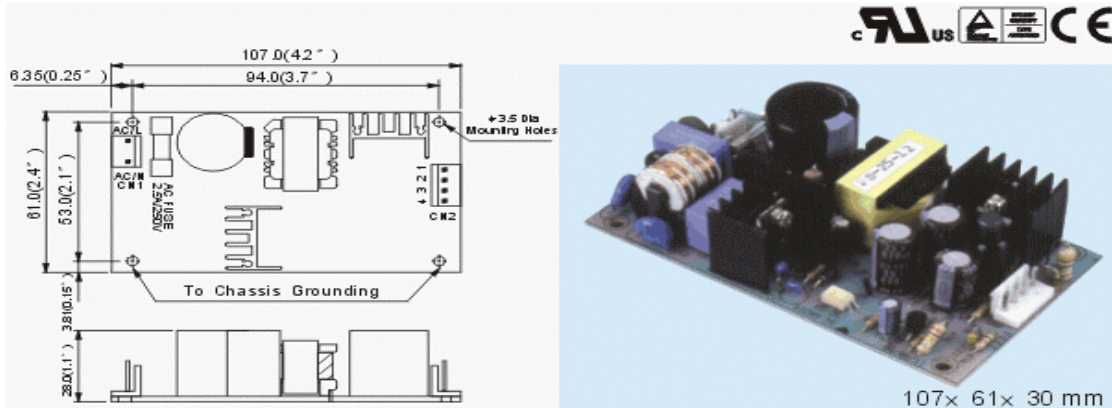

Features.

High Efficiency/High Reliability
 100% Full Load Burn In
 Full Approvals UL,CUL,TUV,CB,CE
 Small 107 x 61mm Footprint
25 Watt Single Output Versions Available, Please Inquire.(Also 45 & 65 Watt)

Built In EMI Filter/Low Ripple Noise
 Short Circuit, Over Voltage, Over Load-
 Protection
 Low Cost, From Stock/Short Lead Time

Specification.

Universal Input
 Output Voltage
 Over Load Protection

 Over Voltage Protection
 Set Up, Rise, Hold Up Time
 Withstand Voltage

 Operating Temperature
 Storage Temperature
 Safety Standard
 EMC Standard

85~264 VAC, 47~63Hz / 127~370VDC
 See Table Below,
 Above 105%, Output Hiccup Mode,
 Auto Recovery.
 115~135% Of Output Voltage
 200ms, 30ms, 20ms
 I/P-O/P : 3KVAC, I/P-FG : 1.5KVAC,
 O/P-FG : 0.5KVAC, 1 Min
 -10~+60°C, Refer to Derating Curve
 -20~+85°C
 UL1950, TUV EN60950
 CIPR22 EN55022 Class B, EN61000-4-
 2,3,4,5 EN61000-3-2,3

Model	Output 1	Output 2	Ripple/Noise	Efficiency
PD-25A	+5V, 0.2~2.5A	+12V, 0.1~1.5A	50mV/150mV	71%
PD-25B	+5V, 0.2~2.0A	+24V, 0.1~1.0A	50mV/200mV	77%
PD-2505	+5V, 0.1~3.0A	-5V, 0.1~2.5A	50mV/50mV	73%
PD-2512	+12V,0.1~1.2A	-12V,0.1~1.2A	50mV/50mV	74%
PD-2515	+15V,0.1~1.0A	-15V, 0.1~1.0A	50mV/50mV	75%
PD-2503	+3.3V,0.2~5.0A	+5V, 0.1~4.0A	50mV/50mV	72%

For full specification, mechanical and connection details please contact ALL PSU sales office.
 Specifications can change without notice, E&OE

Please visit us at www.allpsu.co.uk for our full product range.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
 Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
 Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk