



- Switching Frequency	ca./approx. 120 kHz.
- Short Circuit Protection By	Current limit
- Calibrated At The Factory @	ca. 110...120%I _{nom}
- Overvoltage Protection	Standard
- For 5V types	ca. 6,5V
- For 12V types	ca. 16 V
- For 15V types	ca. 19 V
- For 24V types	ca. 28 V

Mechanical Drawing

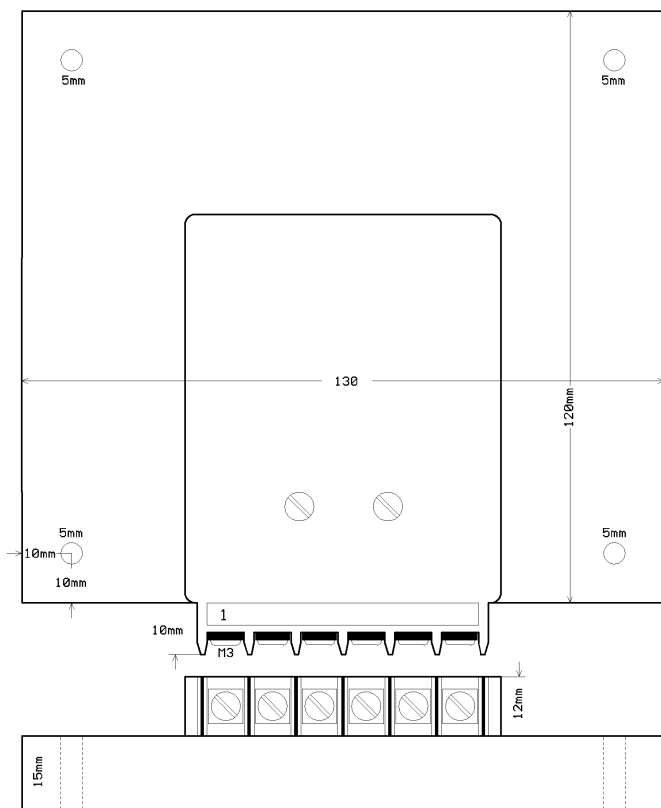

Block Diagram

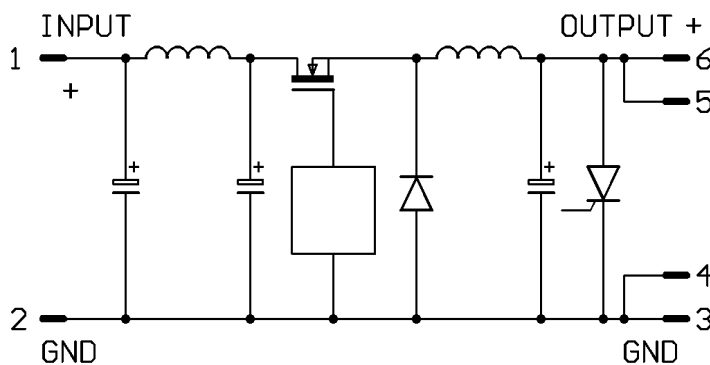

Part Number System

SV30A - X Y

Series SV30A
 X = Input Voltage Code.
 Y = Output Voltage Code.

Overall Dimensions in mm 130 x 120 x 27 mm
 15 mm Thick Base Plate Is Aluminium.

*Other Units In this Series Are Available From 40 to 120 Watts With Isolated Outputs,
 And Up To 600 Watts Non Isolated.*

*For More Information On This Or Other Products Pleased Contact The ALL PSU Sales Office.
 Or Visit Us At www.allpsu.co.uk*