

ALL PSU DATA SHEET.

Cont.. 40 Watt Rugged Encapsulated DC-DC Converter, SVi Series.


Specifications

Isolation Resistance	100 M Ω min. (Higher on request)
Output shortcircuit protected by current limit Constant Current	ca. 120 % I
Screw terminals	Input & Output

Terminal Pin-Out / Connections

Positive Input DC	+ V in =	1
Negative Input DC	- V in =	2
Positive Output	+ V out =	3
Negative Output	- V out =	6
Positive Sense Line	+ S =	4
Negative Sense Line	- S =	5

Mechanical Drawing

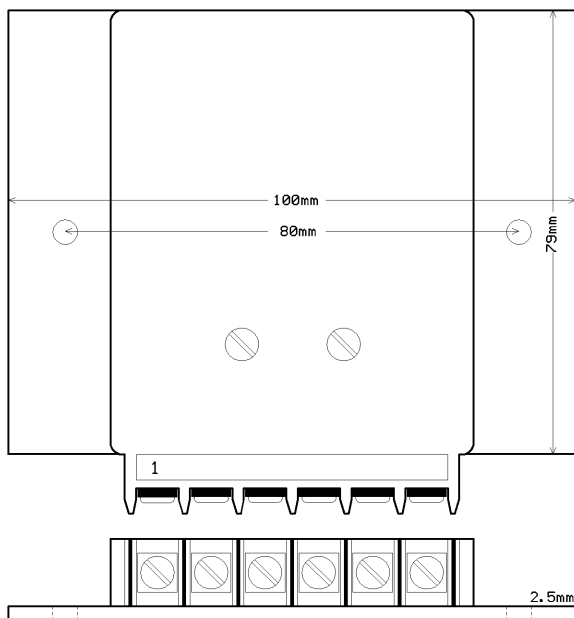

Notes

If the sense lines are not used, they must be connected to the corresponding output connection.

Other input/output voltages or special modules on request.

Dimensions: 100 x 90 x 18mm
Weight: 200g

Order example

SVi841 - 5 3

Unit Type SVi 841
Input Voltage (48VDC)
Output Voltage (15VDC)

Other Models Available In This Series Include Isolated Units To 120 Watt and Non Isolated Versions to 600 Watts.

For further information or pricing details please contact the ALL PSU sales office.
Specifications may change without notice, E&OE.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111.

Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk.