


ALL PSU DATA SHEET.

150 Watt Fully Enclosed DC-DC Converter, SD Series.

- * DC Inputs From 19 to 144 V
- * Isolated Output
- * Low Ripple, Built In Filter
- * Protections, Short Circuit, Over Load, Over Voltage.
- * High Reliability
- * Adjustable Output
- * Conformal Coating Option
- * CE Marked.
- * DIN Rail Mount Option

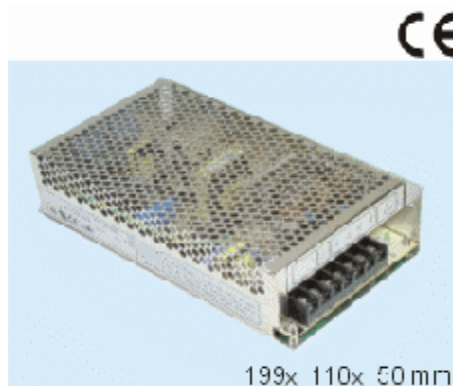

Units In This Range Are Also Available From 25 To 350 Watts With Inputs Up To 144 VDC.

Specification.

Input Voltage	See Table Below, Inputs From 19~144 VDC
Output Voltage	See Table Below, Plus Adjustment Range
Line Regulation	+/-0.5% (max)
Load Regulation	+/-0.5% (max)
Over Load Protection	105~135% Pulsing Mode, Auto Recovery
Over Voltage Protection	130~165% Of Nominal Output Voltage
Withstand Voltage	500 VDC / 1.5KVAC I/P~O/P
Working Temperature	-10~+60°C (refer to derating curve)
Safety Standards	24 & 48 Volt I/P Units Meet LVD Requirements
EMC Standards	EN55022 class B, EN61000-4-2,3,4,6,8

Model	Input Voltage	Output Voltage	Output Adjustment	Ripple & Noise	Efficiency
SD-150B-12	19~36 VDC	12V / 12.5A	11~16 Volts	120mV	75%
SD-150B-24	19~36 VDC	24V / 6.3A	23~30 Volts	150mV	77%
SD-150C-12	36~72 VDC	12V / 12.5A	11~16 Volts	120mV	77%
SD-150C-24	36~72 VDC	24V / 6.3A	23~30 Volts	150mV	80%
SD-150D-12	72~144 VDC	12V / 12.5A	11~16 Volts	120mV	79%
SD-150D-24	72~144 VDC	24V / 6.3A	23~30 Volts	150mV	82%

*Further PCB Mounting Converters Are Available From 0.5 Watt To 500 Watts And Fully Enclosed, Chassis Or Rack Versions Are Available Up To 2400 Watts.
More Details Can Be Seen At www.allpsu.co.uk*

For full specification and mechanical details please contact ALL PSU sales office. Specifications may change without notice, E&OE. ALL PSU Terms & Conditions Apply.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk