

60 Watt, AP60 Series, Desk Top, (12 or 24 Volts Single Output)



electronicpowersolutions

- Universal AC Input
- 3 Pole IEC Inlet With Earth, Class I
- Full Approvals UL/TUV/CE
- Protected For Short Circuit / Over Load
- LED Power On Indicator
- 2 Year Warranty
- DOE Level VI Compliant
- Low Cost / From Stock




Specification

Input Voltage.....	85~264 Volts AC
Input Frequency.....	47~63 Hz
Efficiency.....	Typically 87+%
Ripple & Noise.....	Typically 1%
Output Protection.....	Over Load, Short Circuit, Over Voltage & Over Temperature
Temperature Range.....	Operating: 0 to +40 °C
Humidity.....	0 to 95% (non-condensing)
CE Mark.....	Compliance to Low Voltage & EMC directives
Safety Standards.....	EN60950, UL60950, UL6500, CE, TUV, EN60065,
EMI Standards.....	EN55013, EN55020, EN55022, EN55024, EN61000-3-2,3
Input Connector.....	3 pin IEC inlet (IEC 320-C14)
Output Connector.....	Standard 2.1mm or 2.5mm positive centre bore (Options of other alternatives available)
Output Lead Length.....	Typically 1000mm minimum
Output Lead Gauge	12 Volt output 16AWG, 24 Volt output 18AWG
Case Size.....	116(L) x 51(W) x 31(H) mm
AC Mains Lead.....	Also available from ALL PSU Ltd UK, Euro, USA (Black 2 Metres long)

Models and Ratings

Model	Output Voltage	Output Current	Ripple & Noise	Output Connector Size
AP60A12-P2.1	12.0 V	5.0 A	120 mV	2.1 x 5.5 x 11mm
AP60A24-P2.1	24.0 V	2.5 A	240 mV	2.1 x 5.5 x 11mm
AP60A12-P2.5	12.0 V	5.0 A	120 mV	2.5 x 5.5 x 11mm

Mechanical Details

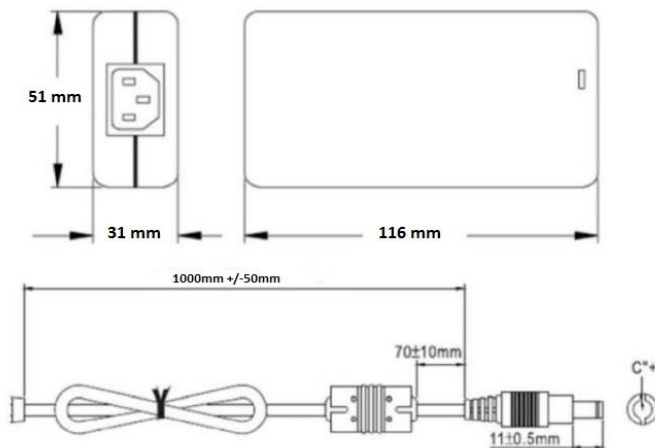

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email: sales@allpsu.co.uk, Web: www.allpsu.co.uk**