

- Universal AC Input
- Fixed UK Head (Euro version option)
- EN60950-1:2006 Approved
- No Load Power Consumption <0.3 Watts
- Protected For Short Circuit / Over Load
- Compact & Lightweight
- 1 Year Warranty




### Specification

Input Voltage.....	90~264 VAC, 47~63 Hz
Inrush Current.....	50A Max
Output Voltage.....	See table below
Line Regulation.....	2% Maximum
Operating Temperature.....	0 to +40 °C
Storage Temperature.....	-20 °C to +70 °C
Safety Standards.....	EN60950-1:2006
EMC Standards.....	EN55022 (EN61000-3-2,3) EN55024 (IEC610004-2,3,4,6,8,11)
Output Plug .....	2.1 x 5.5 x 11 mm Barrel Connector
MTBF.....	50 khrs (MIL-HDBK-217F) @ 25 °C
Dimensions.....	72(L) x 49(W) x 38(D) (plus pins) mm
Weight.....	132g each

**Model and Rating, (UK version listed, Euro version also available, replace suffix U with E).**

Model	Output Voltage	Output Current	Efficiency (typ)
ECP-15-5-U	5 Volts	3.0 Amps	77%
ECP-15-7.5-U	7.5 Volts	2.0 Amps	78%
ECP-15-9-U	9 Volts	1.67 Amps	78%
ECP-15-12-U	12 Volts	1.25 Amps	79%
ECP-15-15-U	15 Volts	1 Amp	78%
ECP-15-18-U	18 Volts	0.83 Amps	79%
ECP-15-24-U	24 Volts	0.63 Amps	79%

### Mechanical Details

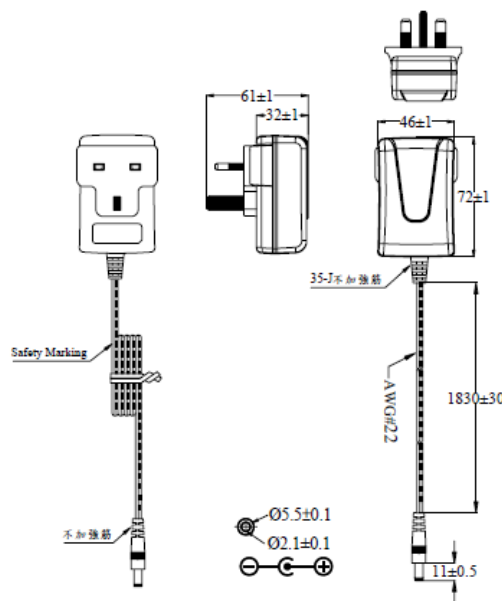

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions Apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111  
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk**