

- Universal AC Input
- Fixed UK Head (Euro version option)
- EN60950-1:2006 Approved
- No Load Power Consumption <0.3 Watts
- Protected For Short Circuit / Over Load
- Compact & Lightweight
- 1 Year Warranty



CE


### Specification

Input Voltage.....	90~264 VAC, 47~63 Hz
Inrush Current.....	50A Max
Output Voltage.....	See table below
Line Regulation.....	2% Maximum
Operating Temperature.....	0 to +40 °C
Storage Temperature.....	-20 °C to +70 °C
Safety Standards.....	EN60950-1:2006
EMC Standards.....	EN55022 (EN61000-3-2,3) EN55024 (IEC610004-2,3,4,6,8,11)
Output Plug .....	2.1 x 5.5 x 11mm Barrel Connector
MTBF.....	50 khrs (MIL-HDBK-217F) @ 25 °C
Dimensions.....	79(L) x 52(W) x 40(D) (plus pins) mm
Weight.....	202g each

### Model and Rating, (UK version listed, Euro version also available).

Model	Output Voltage	Output Current	Efficiency (typ)
ECP-30-12U	12 V	2.5 A	83%
ECP-30-15U	15 V	2 A	83%
ECP-30-18U	18 V	1.66 A	83%
ECP-30-24U	24 V	1.25 A	83%

### Mechanical Details

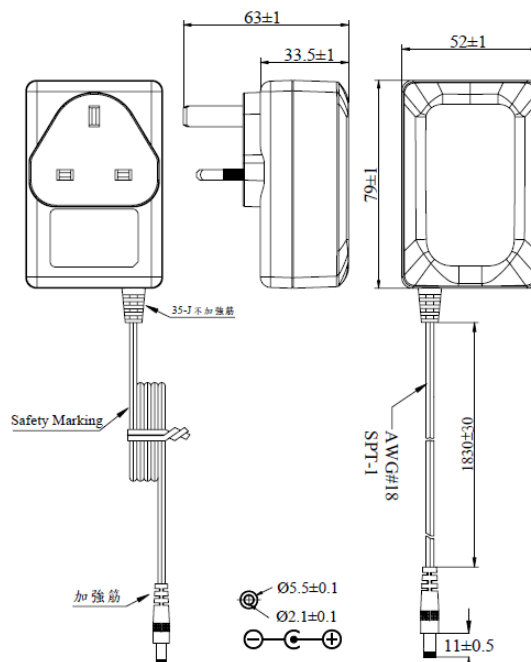

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions Apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111  
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk**