

60 Watt (80 Watt peak), SPU68 Series, Desktop, Single Output



- Universal Input
- 11-13 or 21-27 V Output Across Models
- 60 Watt continuous Output Power, 80 Watts Peak For High Current Start Up Capability
- 100% Full Load Burn In
- 2 Year Warranty
- CEC & Energy Star Compliant
- Optional Output Connectors Available



Specification


Input Voltage.....	90~264 VAC, 47~63 Hz
Input Current.....	0.5 A @ 230 VAC, 1 A @ 115 VAC
Output Voltage.....	See table below (factory set at any Voltage within range)
Line Regulation.....	+/-0.5% typically @ full load
Load Regulation.....	+/-3% typical @ 230 VAC input
Hold Up Time.....	16 ms minimum @ 110 VAC
Leakage Current.....	0.5 mA typ
Isolation Voltage.....	I/P-O/P: 3 kVAC
Operating Temperature.....	0 °C to +70 °C (100% load to 50 °C, derates to 50% @ 70 °C)
Safety Standards.....	EN60950 (TUV), UL60950, CE
EMC Standard.....	Class B
Dimensions & Weight.....	146(L) x 76(W) x 43(H) mm, 275g
Output connector and cable.....	Optional Output Connector please consult ALL PSU office Typically 1.2m cable length. Contact ALL PSU for alternate connectors

Models & Ratings

Model	Output Voltage	Voltage Range (Factory Settable)	Max Output Current	Output Peak Current
SPU68-105	12 VDC	11~13 VDC	5.00A	6.66 A
SPU68-108	24 VDC	21~27 VDC	2.50 A	3.33 A

Note : Units will supply up to 60 Watts continuously and have 80 Watt peak rating.

Mechanical Details

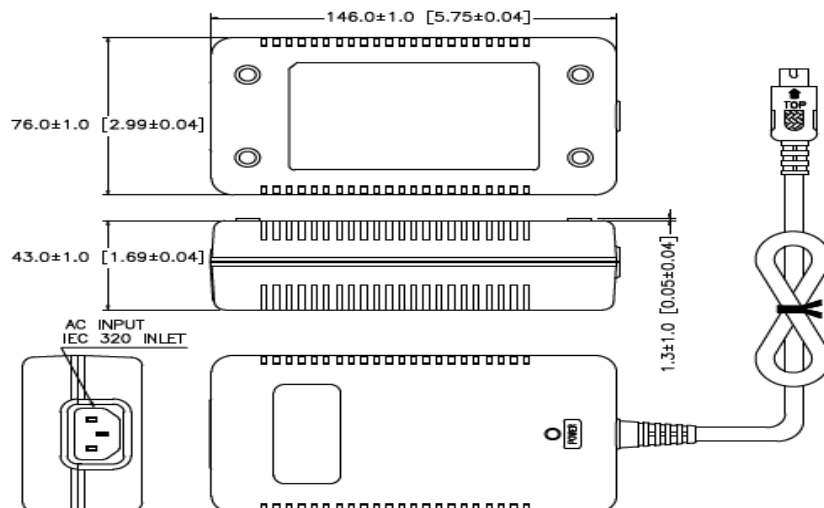

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions apply.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
 Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,
 Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk