

15 Watt, APCN Series, Encapsulated Power Supply



electronicpowersolutions

- Universal AC Input
- Fully Encapsulated, PCB Mounting Plastic Case Plus Options Of Chassis Or DIN Rail Mounting With Screw Terminal Connections*
- Extra Wide Temperature Range
- Short Circuit, Over Load & Over Voltage Protected
- Convection Cooled To Full Power
- Full Approvals: UL/CE
- Low Ripple And Noise



Specification

Input Voltage.....	90~264 VAC, 50~60 Hz (120-370 VDC)
Inrush Current.....	15 A @ 115 VAC, 30 A @ 230 VAC
Output Voltage.....	See table below, +/-2% preset accuracy
Load Regulation (10% to full load).....	+/-1%
Line Regulation (full range).....	+/-0.5%
Over Voltage Protection.....	Zener diode clamp
Short Circuit Protection.....	Hiccup mode, indefinite (automatic recovery)
Input to Output Isolation.....	I/P-O/P: 4 kVAC,
Operating Temperature	-40 to +70 °C, see derating curve
Storage Temperature.....	-40 to +85 °C
Safety Standards.....	UL/cUL, CE
EMC.....	EN55022 Class B, EN55024
Mechanical (PCB Mount Version).....	Encapsulated, 55 x 45 x 20.5 mm
Case Material.....	Plastic (flammability to UL 94V-0)
Weight.....	80g
Connections Input & Output.....	PCB mounting: through hole pins
Mechanical Options.....	Chassis mounting with screw terminal connections DIN Rail mounting with screw terminal connections

Models and Ratings

Model	Output Voltage	Max Output Current	Efficiency
APCN-5S-AP	5.0 V	3 A	78%
APCN-12S-AP	12.0 V	1.25 A	82%
APCN-15S-AP	15.0 V	1 A	81%
APCN-24S-AP	24.0 V	0.625 A	82%

Please see next page for mechanical drawings, connections and temperature derating.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
 Rochester, Kent, ME2 4HU, Tel: 01634 725527, Fax: 01634 739111
 Email: sales@allpsu.co.uk, Web: www.allpsu.co.uk

15 Watt, APCN Series, Encapsulated Power Supply




electronicpowersolutions

Standard PCB Mounting Version

Pinout

Top View

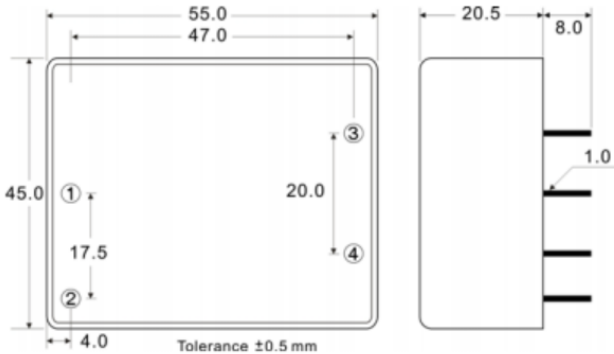


Pin	Connection
1	AC Neutral
2	AC Live
3	-DC Out
4	+DC Out



*Mechanical Options - add suffix:

- A2 = Chassis mounting with screw terminals for stripped wires
 - A5 = Chassis mounting with screw terminals for crimped terminals
 - DN = DIN Rail mounting with screw terminal connections
- Please contact ALL PSU sales office for further details.

Option "A2"

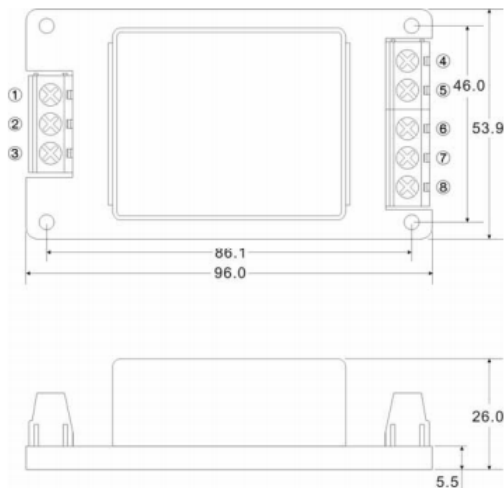

Option "A5"

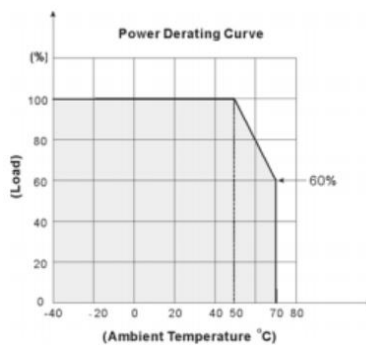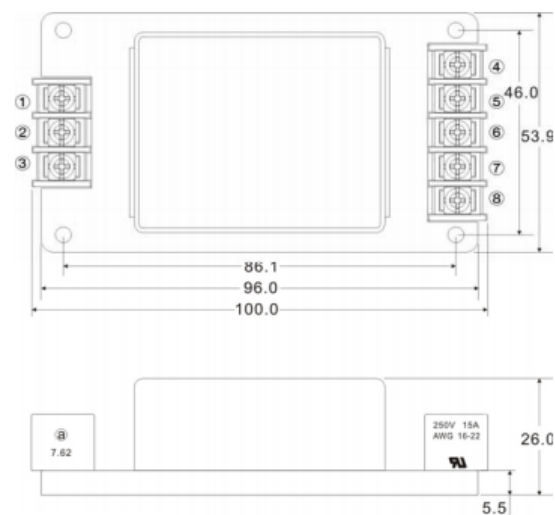

Specifications may change without notice. E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel: 01634 725527, Fax: 01634 739111,
Email: sales@allpsu.co.uk Web: www.allpsu.co.uk**