

10 Watt, PM-10 Series, Encapsulated (Single Output)

ALL PSU LTD
Electronic Power Solutions

- Universal AC Input
- Compact PCB Mounting Format
- Short Circuit, Overload, Over Voltage Protection
- High Reliability, 100% Burn In
- 3 Year Warranty
- Very Competitive Prices
- Full International Safety Approvals
- Approved For Both Medical & Industrial Use



Size: 70 x 50 x 22.7 mm

Specification

Universal Input.....	85~264 VAC / 120~370 VDC
Frequency.....	47~440 Hz
Fixed Output Voltage.....	See table below for models
Over Load Protection.....	>105%, output hiccup mode, (auto-recovery)
Over Voltage Protection.....	Shuts off o/p voltage, clamping by zener diode
Set Up, Rise, Hold Up Time.....	1000 ms, 20 ms, 100 ms, full load & 230 VAC
Isolation Voltage.....	I/P-O/P: 4 kVAC
Switching Frequency.....	67 kHz (fixed)
Line Regulation.....	+/-1.0% (3.3~5 V models), +/-0.5% (12~24 V models)
Load Regulation.....	+/-1.0% (3.3~15 V models), +/-0.5% (24 V models)
Operating Temperature.....	-20 to +70 °C (see derating curves)
AC Input Current.....	0.25 A @ 115 VAC, 0.15 A @ 230 VAC
Inrush Current.....	45A @ 230VAC (cold start)
Storage Temperature.....	-40 to +85 °C
Safety Standard.....	UL60601-1, TUV EN60601-1, IEC60601-1
EMC Standard.....	EN55011 (CISPR11) EN55022 (CISPR22) Class B EN61000-4-2, 3, 4, 5, 6, 8, 11 EN61000-3-2,3, ENV50204, EN55024, EN60601-1-2 EN61204-3 Medical Level, Criteria A.
MTBF.....	723.2 Khrs MIL-HDBK-217F (25°C)
Size	70 x 50 x 22.7 mm
Connection.....	PCB Mounting Through Hole, (pin out see drawing)


Models and Ratings

Model	Output Voltage	Output Current	Ripple/Noise	Efficiency
PM-10-3.3	3.3 V	2.5 A	80 mV	66%
PM-10-5	5.0 V	2 A	80 mV	74%
PM-10-12	12.0 V	0.85 A	150 mV	78%
PM-10-15	15.0 V	0.67 A	150 mV	79%
PM-10-24	24.0 V	0.42 A	240 mV	79%


**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email: sales@allpsu.co.uk Web: www.allpsu.co.uk**

10 Watt, PM-10 Series, Encapsulated (Single Output)


Mechanical Details

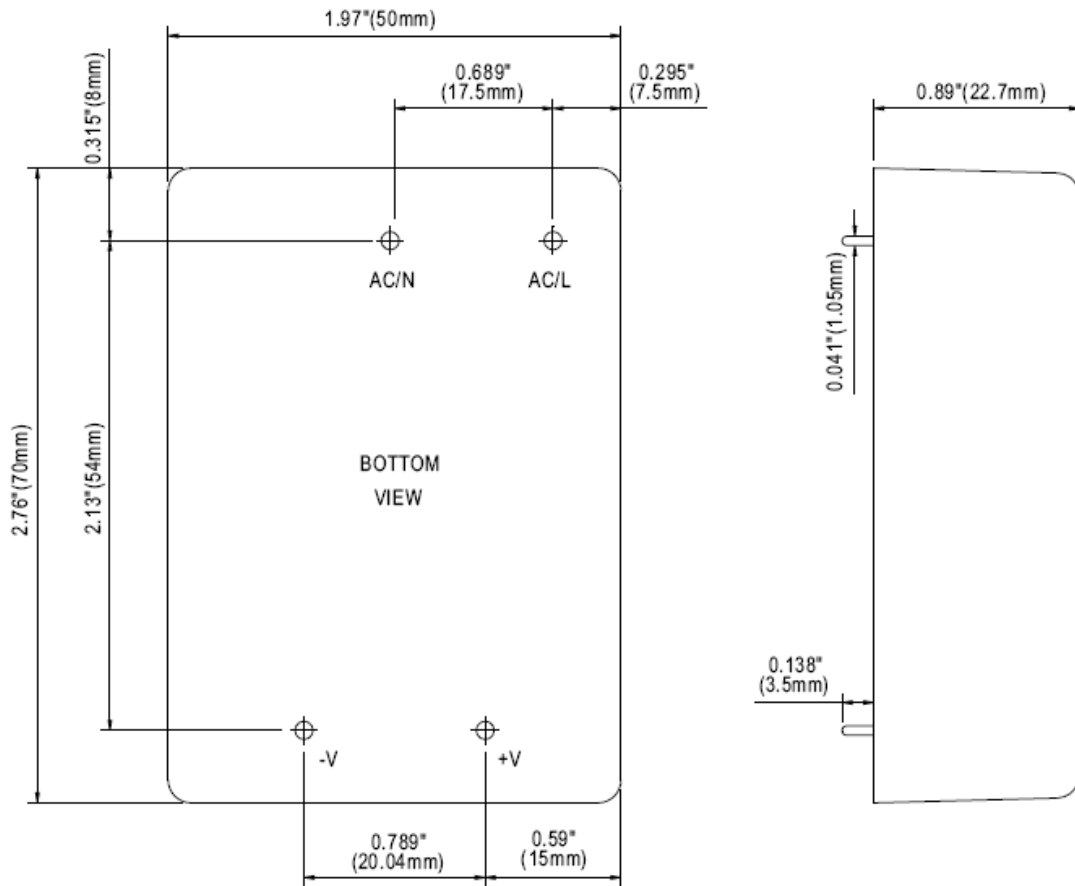

Derating Curve

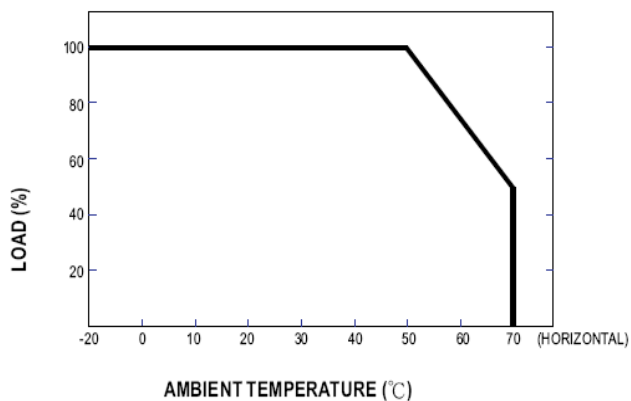

Output Derating VS Input Voltage

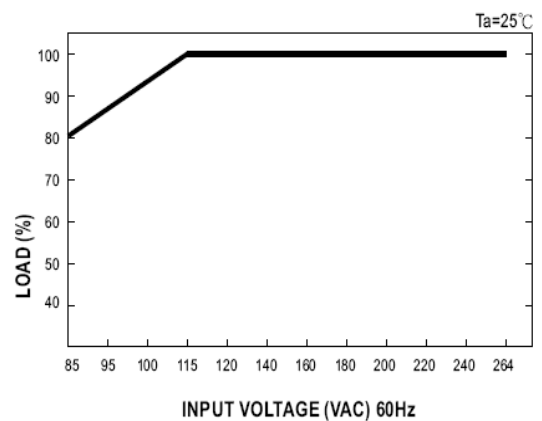

Specifications may change without notice, E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email: sales@allpsu.co.uk Web: www.allpsu.co.uk**