

- Wide 2:1 Input Range
- Optional Remote on/off Control
- 1600V Isolation
- Ultra Compact 1x1" Encapsulated Metal Case
- PCB Mounting, Option of Chassis Or Din Rail Mount.
- Competitive Prices & 2 Year Warranty
- High Efficiency up to 89%
- Wide Operational Temperature Range



Specification (typical values shown)

Input Ranges.....	9~18, 18~36 and 36~75 Volts
Outputs.....	Single outputs (see table below)
Line Regulation.....	+/-0.5%
Load Regulation.....	+/-1%
Output Ripple.....	75mV max (3.3 or 5 V o/p) 100mV max (others)
Output Noise.....	100mV max (3.3 or 5 V o/p) 125mV max (others)
Efficiency.....	See table for each model
Short Circuit Protection.....	Current limit, auto-recovery
Isolation Voltage.....	1600 VDC
Operating Temperature.....	-40 to +70 °C @ full load, Derates to 40% at +85°C
Storage Temperature.....	-55 to +105 °C
Case Material.....	6 sided shielded Aluminium, non conductive base
Switching Frequency.....	300 kHz (12 & 15 V o/p), 450kHz (3.3 & 5 V o/p)
MTBF.....	>800,000 hrs @ 25°C (MIL-HDBK-217F)
Warranty.....	2 Years


Models and Ratings

Model	Input Range (VDC)	Output (VDC)	Output Current	Efficiency
SW15-12-3.3S-AP	9-18 Volts	3.3 Volts	3.5 Amps	85%
SW15-12-5S-AP	9-18 Volts	5.0 Volts	3.0 Amps	89%
SW15-12-12S-AP	9-18 Volts	12 Volts	1.25 Amps	88%
SW15-12-15S-AP	9-18 Volts	15 Volts	1.0 Amps	88%
SW15-24-3.3S-AP	18-36 Volts	3.3 Volts	3.5 Amps	86%
SW15-24-5S-AP	18-36 Volts	5 Volts	3.0 amps	89%
SW15-24-12S-AP	18-36 Volts	12 Volts	1.25 Amps	89%
SW15-24-15S-AP	18-36 Volts	15 Volts	1.0 Amps	89%
SW15-48-3.3S-AP	36-75 Volts	3.3 Volts	3.5 Amps	84%
SW15-48-5S-AP	36-75 Volts	5 Volts	3.0 Amps	88%
SW15-48-12S-AP	36-75 Volts	12 Volts	1.25 Amps	88%
SW15-48-15S-AP	36-75 Volts	15 Volts	1.0 Amps	88%

Note : 20 Watt versions are available in the same package size, please see SW20 series.

For mechanical data and pinout, please see next page


**Mechanical Details and Pin-Out
Top View**

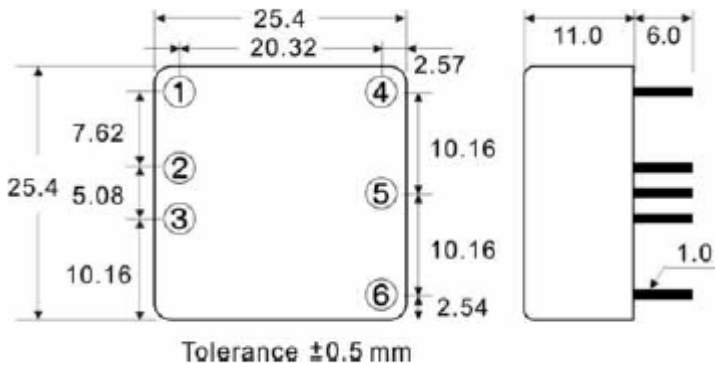

Pin	Single O/P
1	On/Off R/C
2	-V in
3	+V in
4	-V out
5	No Pin
6	+V out
Pin 1 Optional R/C	

Standard format PCB mounting, options available for Screw Terminal or DIN Rail mounting adaptors, please contact ALL PSU sales office for details.

Derating Curve

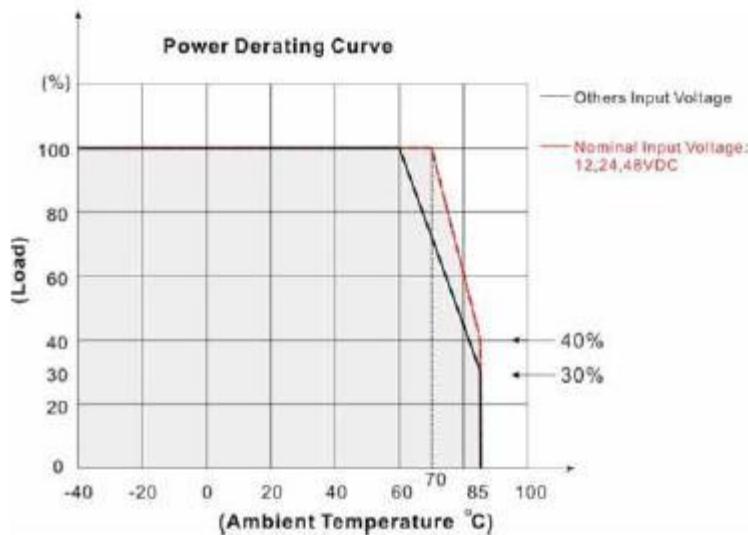

Specifications may change without notice, E&OE. ALL PSU Terms & Conditions apply.

**ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk**