


ALL PSU DATA SHEET.

75 Watt PFC Series, (Triple Output).



- Universal Input with PFC
- High Efficiency/Reliability
- AC Surge Current Limiting
- 100% Full Load Burn In
- Short Circuit, Over Load, Over Voltage Protection
- Full Approvals :
UL/CUL/TUV/CB/CE
- 3 Year Warranty
- Low Profile Only 33mm

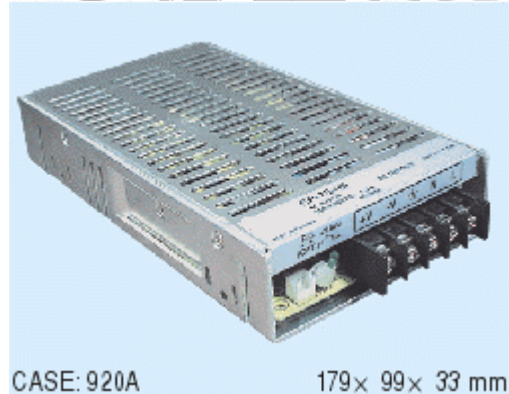

Specification

Input Voltage	90~264 VAC, 47~63Hz, 120~370 VDC
Power Factor	0.98 @ 115 VAC, 0.95 @ 230 VAC
Output Voltage	See Table Below (plus adjustment range O/P 1)
Over Load Protection	105~150% Hiccup Mode, Auto Recovery
Over Voltage Protection	O/P : 115~135% Of Output 1 Voltage
Withstand Voltage	I/P-O/P : 3KVAC, I/P-FG:1.5KVAC
Operating Temperature	-10°C~+60°C (see derating curve)
Safety Standards	UL1950, TUV EN60950
EMC Standard	EN55022 Class B, EN61000-3-2,3 EN61000-4-2, 3,4,6,8,11, ENV50204

Model	Output 1	Output 2	Output 3	Max. Power
TP-75A	5V / 1.5-10A	12V / 0.2-4.0A	-5V / 0-0.6A	74 Watts
TP-75B	5V / 1.5-10A	12V / 0.2-4.0A	-12V / 0-0.6A	76 Watts
TP-75C	5V / 1.5-10A	15V / 0.2-3A	-15A / 0-0.6A	75 Watts
TP-75D	5V / 1.5-10A	24V / 0.2-1.5A	12V / 0-0.6A	76 Watts
TP-7503	5V / 1.5-10A	3.3V / 0.2-8A	12V / 0.0.6A	75 Watts

For full specification and mechanical drawing, please contact ALL PSU sales office.
Specifications can change without notice, E&OE. ALL PSU Terms & Conditions Apply.

Further Fully Cased Multi Output Units Are Available From 35 To 1000 Watts.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk