


ALL PSU DATA SHEET.

60 Watt T Series. (Triple Output).

- * Universal Input
- * High Efficiency/Reliability
- * 100% Full Load Burn In
- * Short Circuit, Over Load, Over Voltage Protection
- * Approvals : TUV/UL/CUL/CE/CB
- * 2 Year Warranty
- * Compact size, light weight
- * Convection Cooled.

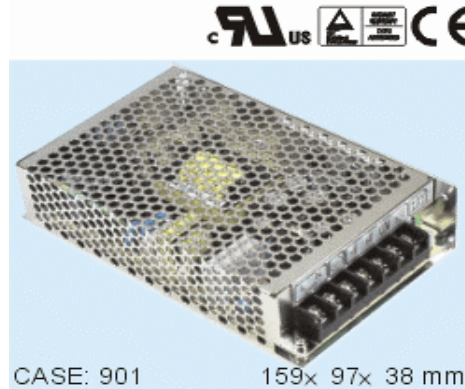

Specification

| | |
|---------------------------|--|
| Input Voltage | 85~264 VAC, 47~63Hz, 120~370 VDC |
| Output Voltage | See Table Below (Output 1 +10%,-5%) |
| Over Load Protection | 105~150% Output pulsing mode Auto Recovery |
| Over Voltage Protection | O/P1, 115~135% Of Output Voltage |
| Setup, Rise, Hold up time | 300ms, 50ms, 80ms Full Load / 230VAC |
| Withstand Voltage | I/P-O/P : 3KV, I/P-FG:1.5KV, 1Min |
| Operating Temperature | 0-50*C @ 100%, -10*C @ 80%, 60*C @ 60% |
| Safety Standards | UL1950, EN60950, UL1012, |
| EMC Standard | EN55022 class B, EN61000-3-2,3, EN50204 EN55024, EN61000-4-2,3,4,5,6,8,11 |

*DIN Rail Mounting Accessories Are Available For This Series.
Higher Power Single And Multi Output Units Are Also Available.*

| Model | Output 1 | Output 2 | Output 3 | Efficiency |
|--------|-----------|--------------|------------|------------|
| T-60A | 5V/0.5~7A | 12V/0.2~3.5A | -5V/0~1A | 72% |
| T-60B | 5V/0.5~7A | 12V/0.2~3.5A | -12V/0~1A | 72% |
| T-60C | 5V/0.5~7A | 15V/0.2~3A | -15V/0~1A | 72% |
| IT-60D | 5V/0.5~3A | 12V/0.1~1A | 24V/0.2~2A | 72% |
| IT-60F | 5V/0.5~3A | 15V/0.1~1A | 24V/0.2~2A | 72% |

Notes :

IT-60 Units have all isolated outputs.

Units will operate safely with no minimum load but regulation specification may be slightly effected.

For full specification and mechanical drawing, please contact ALL PSU sales office.
Specifications can change without notice, E&OE

Further Single Or Multi Output Units Can Be Seen At www.allpsu.co.uk

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,
Email : sales@allpsu.co.uk, Web : www.allpsu.co.uk