


## ALL PSU DATA SHEET.

### 60 Watt T Series. (Triple Output).

- \* Universal Input
- \* High Efficiency/Reliability
- \* 100% Full Load Burn In
- \* Short Circuit, Over Load, Over Voltage Protection
- \* Approvals : TUV/UL/CUL/CE/CB
- \* 2 Year Warranty
- \* Compact size, light weight
- \* Convection Cooled.

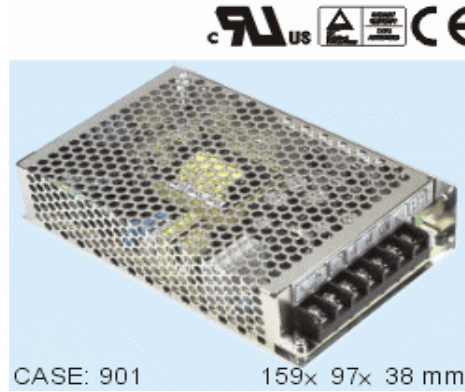

#### Specification

Input Voltage	85~264 VAC, 47~63Hz, 120~370 VDC
Output Voltage	See Table Below (Output 1 +10%,-5%)
Over Load Protection	105~150% Output pulsing mode Auto Recovery
Over Voltage Protection	O/P1, 115~135% Of Output Voltage
Setup, Rise, Hold up time	300ms, 50ms, 80ms Full Load / 230VAC
Withstand Voltage	I/P-O/P : 3KV, I/P-FG:1.5KV, 1Min
Operating Temperature	0-50*C @ 100%, -10*C @ 80%, 60*C @ 60%
Safety Standards	UL1950, EN60950, UL1012,
EMC Standard	EN55022 class B, EN61000-3-2,3, EN50204 EN55024, EN61000-4-2,3,4,5,6,8,11

*DIN Rail Mounting Accessories Are Available For This Series.  
Higher Power Single And Multi Output Units Are Also Available.*

Model	Output 1	Output 2	Output 3	Efficiency
T-60A	5V/0.5~7A	12V/0.2~3.5A	-5V/0~1A	72%
T-60B	5V/0.5~7A	12V/0.2~3.5A	-12V/0~1A	72%
T-60C	5V/0.5~7A	15V/0.2~3A	-15V/0~1A	72%
IT-60D	5V/0.5~3A	12V/0.1~1A	24V/0.2~2A	72%
IT-60F	5V/0.5~3A	15V/0.1~1A	24V/0.2~2A	72%

Notes :

IT-60 Units have all isolated outputs.

Units will operate safely with no minimum load but regulation specification may be slightly effected.

For full specification and mechanical drawing, please contact ALL PSU sales office.  
Specifications can change without notice, E&OE

*Further Single Or Multi Output Units Can Be Seen At [www.allpsu.co.uk](http://www.allpsu.co.uk)*

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111,  
Email : [sales@allpsu.co.uk](mailto:sales@allpsu.co.uk), Web : [www.allpsu.co.uk](http://www.allpsu.co.uk)