


## ALL PSU DATA SHEET.

### 25 Watt Open Frame, (Single & Multi Output Models), SRP-25 Series.

- \* Universal 85-264 VAC Input
- \* High Efficiency
- \* Compact Foot-Print & Low Profile  
Only 101 x 57 x 23.6mm
- \* 2-Year Warranty
- \* Fits 1U Application Enclosures
- \* Single, Dual or Triple Outputs
- \* Optional Base Chassis & Cover
- \* Medical & Industrial Approvals

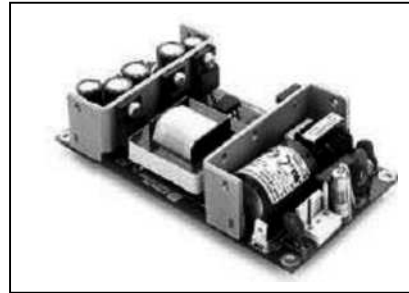

(size 101.6 x 57.2 x 23.6 mm including component lead throughs)

#### Specification.

Universal AC Input	85~264 VAC, 47~63Hz
Output Voltage	See table below, (plus 5% adjustment range on output 1)
Output Power	25 Watts convection cooled (20Watts for 1001)
Over Load Protection	Min 110%, Outputs cycle on/off, Auto Recovery
Over Voltage Protection	Output 1 : 110~150% of nominal value
Start Up Time	1 Second
Hold Time	10ms min, 25 W Output, 120 V Input
Withstand Voltage	I/P-O/P : 5656 VDC
Operating Temperature	0~+70°C, 100% load from 0 to +50°C Derate to 50% load at +70°C
Storage Temperature	-40~+85°C
Safety Standard	UL/EN 60950, UL2601, EN60601-1
EMC Standard	EN55011/22 Class B, EN61000-4-2,3,4,5,6,11,
Connections, Input, & Output,	Plug In Molex, 3.96mm pin pitch. Option of Screw Terminal Connections.

Model	Output 1	Output 2	Output 3
<a href="#">SRP-25-1001</a>	3.3 Volts / 6 Amps		
<a href="#">SRP-25-1002</a>	5 Volts / 5 Amps		
<a href="#">SRP-25-1003</a>	12 Volts / 2.08 Amps		
<a href="#">SRP-25-1004</a>	15 Volts / 1.67 Amps		
<a href="#">SRP-25-1005</a>	24 Volts / 1.04 Amps		
<a href="#">SRP-25-1006</a>	48 Volts / 0.52 Amps		
<a href="#">SRP-25-2001</a>	+5 Volts / 3 Amps	+24 Volts / 1 Amp	
<a href="#">SRP-25-2002</a>	+5 Volts / 3 Amps	+12 Volts / 1.5 Amps	
<a href="#">SRP-25-2003</a>	+5 Volts / 3 Amps	-5 Volts / 2 Amps	
<a href="#">SRP-25-2004</a>	+12 Volts / 1.5 Amps	-12 Volts / 1.5 Amps	
<a href="#">SRP-25-2005</a>	+15 Volts / 1.5 Amps	-15 Volts / 1.5 Amps	
<a href="#">SRP-25-3001</a>	+5 Volts / 3 Amps	+12 Volts / 1.5 Amps	-12 Volts / 0.5 Amps
<a href="#">SRP-25-3002</a>	+5 Volts / 3 Amps	+15 Volt / 1.5 Amps	-15 Volts / 0.5 Amps

Option codes : **-TS** for screw terminal connections,  
**-CH** L-Bracket Chassis, **-CHCO** Chassis and top cover.

For full specification, mechanical and connection details please contact ALL PSU sales office.  
Specifications can change without notice, E&OE. ALL PSU Terms & Conditions Apply.

*Further Units Open Frame Or Enclosed Are Listed At [www.allpsu.co.uk](http://www.allpsu.co.uk)*

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,  
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111  
Email : [sales@allpsu.co.uk](mailto:sales@allpsu.co.uk), Web : [www.allpsu.co.uk](http://www.allpsu.co.uk)