

60 WATTS

SINGLE OUTPUT AC-DC

FEATURES:

- Compact 2.0" x 3.0" x 1.0" Size
- 3 Year Warranty
- Universal 85-264V Input
- Single Output
- 90% Peak Efficiency
- 87% Average Efficiency
- <300mW No Load Input Power
- IEC 60601-1 3rd ed. Medical Cert.
- IEC 62368-1 2nd ed. Certification
- IEC 60601-1-2 4th ed. EMC
- Class B Emissions per EN55011/32
- 0-70°C Operating Temperature
- RoHS Compliant
- Optional Chassis/Cover



CHASSIS/COVER



OPEN FRAME

SAFETY SPECIFICATIONS



Underwriters Laboratories
File E137708/E140259

UL 62368-1:2014, 2nd Edition
CAN/CSA-C22.2 No. 62368-1-14
AAMI/ANSI ES60601-1:2005/(R) 2012
CAN/CSA-C22.2 No. 60601-1:2014



CB Reports/Certificates (including all
National and Group Deviations)

IEC 62368-1:2014, 2nd Edition
IEC 60601-1:2005/A1:2012



TUV SUD America

EN 62368-1:2014, 2nd Edition
EN 60601-1:2006/A1:2013



Low Voltage Directive
RoHS Directive (Recast)

(2014/35/EU of February 2014)
(2015/863/EU of March 2015)



Electrical Equipment (Safety) Regulations 2016 SI No. 1101

Restriction of the Use of Certain Hazardous Substances in EEE Regulations
2012 SI No. 3032 + 2019 SI No.492

MODEL LISTING

MODEL	OUTPUT	P _{OUT}
GRN-60-1001	3.3V/9.0A	30W
GRN-60-1002	5.0V/9.0A	45W
GRN-60-1003	12V/5.0A	60W
GRN-60-1004	15V/4.0A	60W
GRN-60-1005	24V/2.5A	60W
GRN-60-1006	28V/2.2A	60W
GRN-60-1007	48V/1.3A	60W
GRN-60-1008	19V/3.1A	60W

ORDERING INFORMATION

Consult factory for alternate output configurations.

Please specify the following optional features when ordering:

CH - Chassis	OVP - Overvoltage Protection
CO - Cover	DF - Dual Fuse
	IEC - High Breaking Capacity Fuses

GRN-60

OUTPUT SPECIFICATIONS

Output Power at 50°C ₍₁₎	60W	85-264 V _{IN}
(See Derating Chart)		
Voltage Centering	±0.5%	(Output at 50% load)
Voltage Adjust Range	95-105%	
Load Regulation	±0.5%	(0-100% load change)
Source Regulation	0.5%	
Ripple & Noise	1.0%	<150mV (1001,1002)
Turn-On Overshoot	None	
Transient Response	Output recovers to within 1% of initial set point due to a 50% step load change, 500µs maximum, 5% maximum deviation (maximum deviation on 1001: 8%, 1002: 6%).	
Overvoltage Protection	Latching, between 110% and 150% of rated output voltage (optional).	
Overpower Protection	110-160% rated P _{OUT} min., cycle on/off, auto recovery	
Hold-Up Time	10ms typical, full power, 115V input	
Start-Up Time	1 sec., 115/230V input	
Output Rise Time	27ms typical	
Minimum Load	No minimum load required	

INPUT SPECIFICATIONS

Protection Class	I	
Source Voltage	85 - 264 VAC (see derating chart)	
Frequency Range	47 - 63 Hz	
Input Protection ⁽⁵⁾	Internal 2A time-delay fuse	
Peak Inrush Current	50A max. at 230 V	
Peak Efficiency	90%	
Average Efficiency	87% (1003-1008), 85% (1002), 80% (1001)	
Light Load Efficiency	85%, 115/230 V _{IN} , 33% power, 81% (1001), 84% (1002)	
No Load Input Power	<0.3W, 115/230 V _{IN} , no load	

ENVIRONMENTAL SPECIFICATIONS

Cooling	Free air convection	
Ambient Operating Temperature Range	0° to + 70°C	
Derating	see power rating chart	
Ambient Storage Temp. Range	- 40° to + 85°C	
Operating Relative Humidity Range	20-90% non-condensing	
Altitude	10,000 ft. ASL	Operating
	40,000 ft. ASL	Non-operating
Temperature Coefficient	0.02%/°C	
Vibration	2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each.	
Shock	20G, 11ms, 3 axis, 3 each direction.	

GENERAL SPECIFICATIONS

Means of Protection		
Primary to Secondary	2MOPP (Means of Patient Protection)	
Primary to Ground	1MOPP (Means of Patient Protection)	
Secondary to Ground	Operational Insulation(Consult factory for 1MOPP)	
Dielectric Strength ^(7, 8)		
Reinforced Insulation	5656 VDC, Primary to Secondary	
Basic Insulation	2121 VDC, Primary to Ground	
Operational Insulation	707 VDC, Secondary to Ground	
Leakage Current		
Earth Leakage	<300µA NC, <1000µA SFC	
Touch Current	<100µA NC, <500µA SFC	
Switching Frequency	65 KHz	
Remote Sense ⁽⁹⁾	400 mV compensation of output cable losses	
Mean-Time Between Failures	>250,000 hours, MIL-HDBK-217F, 25° C, GB	
Weight	0.24 lbs. Open frame/0.34 lbs. Chassis and cover	

EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4TH ed./IEC 61000-6-2:2005)


Electrostatic Discharge	EN 61000-4-2	±8KV contact / ±15KV air discharge	A
Radiated Electromagnetic Field	EN 61000-4-3	80MHz-2.7GHz, 10V/m, 80% AM	A
Electrical Fast Transients/Bursts	EN 61000-4-4	±2 KV, 5KHz/100KHz	A
Surge Immunity	EN 61000-4-5	±2 KV line to earth / ±1 KV line to line	A
Conducted Immunity	EN 61000-4-6	0.15 to 80MHz, 10V, 80% AM	A
Magnetic Field Immunity	EN 61000-4-8	30A/m, 60 Hz.	A
Voltage Dips	EN 61000-4-11	0% U _r , 0.5 cycles, 0-315°	100/240V A/A
		0% U _r , 1 cycles, 0°	100/240V A/A
		40% U _r , 10/12 cycles, 0°	100/240V B/A
		70% U _r , 25/30 cycles, 0°	100/240V B/A
Voltage Interruptions	EN 61000-4-11	0% U _r , 300 cycles, 0°	100/240V B/B
Radiated Emissions	EN 55011/32	Class B	
Conducted Emissions	EN 55011/32	Class B	
Harmonic Current Emissions	EN 61000-3-2	Class A	
Voltage Fluctuations/Flicker	EN 61000-3-3	Compliant	

All specifications are maximum at 25°C/60W unless otherwise stated, may vary by model and are subject to change without notice.

ALL PSU LTD, Unit D6 Laser Quay, Culpeper Close
Medway City Estate, Rochester, Kent, ME2 4HU

Tel: 01634 725527, Email: sales@allpsu.co.uk, Web: www.allpsu.co.uk

GRN-60 SINGLE MECHANICAL SPECIFICATIONS

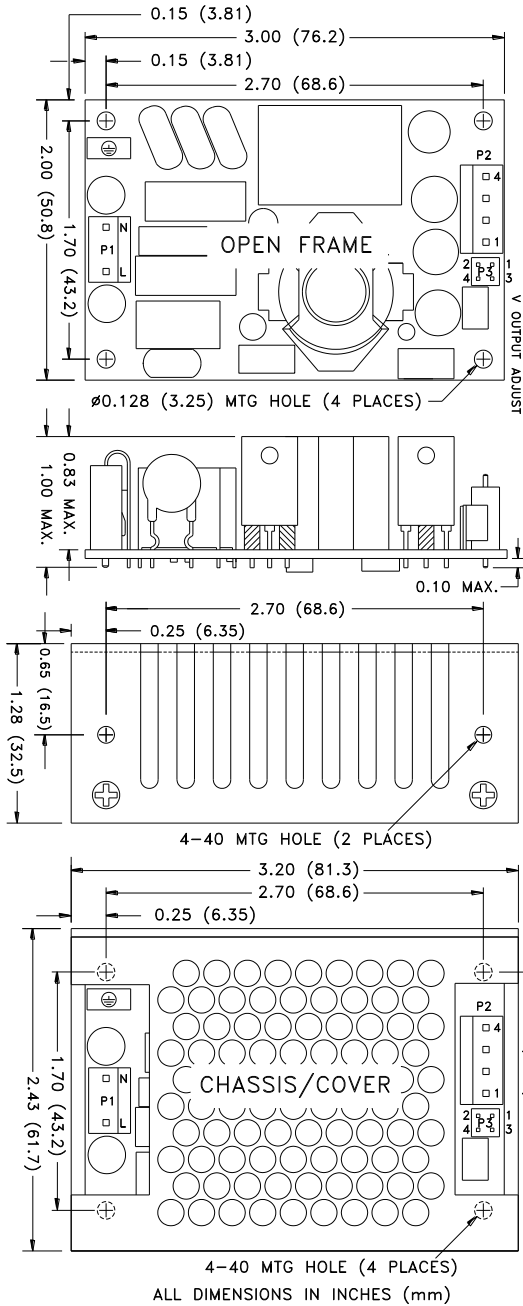


CONNECTOR SPECIFICATIONS

<p>P1</p>	<p>NEUTRAL LINE</p> <p>AC Input</p>	<p>0.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal.</p>
<p>P2</p>	<p>DC Output</p>	<p>0.156 friction lock header mates with Tyco 770849-4 or equivalent crimp terminal housing with Tyco 3-640707-1 equivalent crimp terminal.</p>
<p>P3</p>	<p>DC Sense</p>	<p>0.100 breakaway header mates with Molex 22-55-2041 or equivalent crimp terminal housing with Molex 71851 or equivalent crimp terminal.</p>
	<p>Ground</p>	<p>0.187 quick disconnect terminal</p>


APPLICATIONS INFORMATION

1. Continuous Output Power must not exceed 60W.
2. Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
3. Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
4. This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
5. Standard models include only one UL-listed fuse in the line conductor of the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in the neutral conductor of the end product, and may need to have high breaking capacity as determined by the end product application. Models with the DF suffix include a fuse in the line and neutral leads. With high breaking capacity fuses, maximum product height specification may be exceeded in open frame configuration.
6. Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
7. This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1ST Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
8. This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
9. Remote-Sense terminals may be used to compensate for cable losses up to 400mV, depending on model. The use of a twisted pair, decoupling capacitors and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
10. Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
11. To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
12. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.

TYPICAL EFFICIENCY vs. LOAD

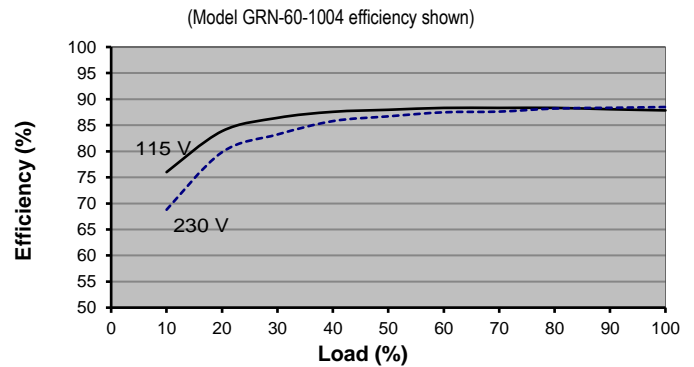

MAX P_{OUT} vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

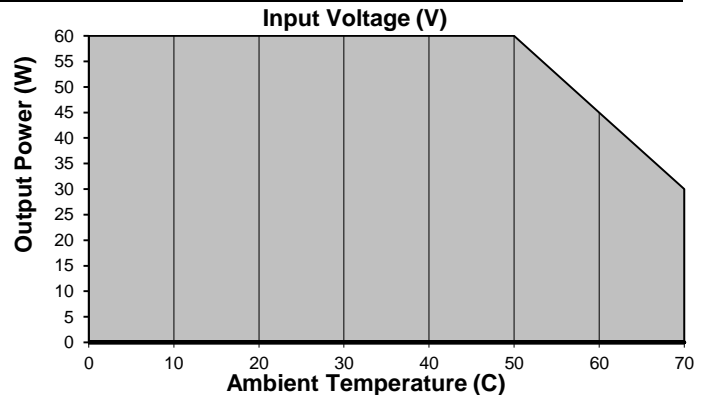

Derating requirements - Derate from 100% load at 50°C to 50% load at 70°C.