

V1-S/D01(02)-1W Series

1W Unregulated Dual Separate output



electronic power solutions

Features

- 7 Pin SIL / 14 Pin DIL Package
- 1000 VDC Isolation
- Up to 3000 VDC Isolation
- Low Ripple and Noise
- Efficiency up to 80%
- -40 ~ 85°C Operation Temperature Range
- Non-Conductive Black Plastic Case



The V1 series is a family of cost effective 1W dual separate output DC-DC converters. These converters achieve low cost and ultra-miniature SIP 7 pin or DIP 14 pin size. Devices are encapsulated using flame retardant resin. The models operate from input voltage of 5, 12, 24 Vdc with output voltage of 3.3, 5, 7.2, 9, 12, 15, 18, 24 Vdc. High performance features include 1000Vdc~3000Vdc input/output isolation, high efficiency operation and output voltage accuracy of ±3% maximum. Standard features include an input range of ±10% tolerance and low output noise and ripple.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS

Voltage accuracy	±3%
Line regulation	±1.2% / Per 1% Vin Change
Load regulation	(From 20% to 100% Load) ±10% (Output 3.3V Model) ±20%
Ripple & noise (20 MHz bandwidth)(1)	75mV pk-pk
Temperature coefficient	±0.02%/°C
Capacitor load(2)	See table

PHYSICAL SPECIFICATIONS

Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	0.5mm Alloy42 Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	(SIP/2.3g) (DIP/2.6g)
Dimensions	SIP Case 0.76"x0.24"x0.39" DIP Case 0.80"x0.40"x0.27"

INPUT SPECIFICATIONS

Voltage Range	±10%
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	Capacitors
Input Reflected Ripple Current(3)	20mA pk-pk

ENVIRONMENT SPECIFICATIONS

Operating Temperature	-40°C~85°C See Derating Curve
Maximum Case Temperature	100°C
Storage Temperature	-40°C~125°C
Cooling	Nature Convection

ABSOLUTE MAXIMUM RATINGS(4)

These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

Input Surge Voltage(100mS)	
5 Models	7 Vdc ,max.
12 Models	15 Vdc ,max.
24 Models	28 Vdc ,max.
Soldering Temperature (1.5mm from case 10sec max.)	260°C ,max.

GENERAL SPECIFICATIONS

Efficiency	See table
I/O Isolation Voltage(60sec)	
Input/Output1&Output2	1000~3000Vdc
Output1/Output2	1000Vdc
I/O Isolation Capacitance	60 pF Typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	Variable 80kHz
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.121 Mhrs
Safety Standard (designed to meet)	IEC/EN 60950-1 , 62368-1 UL/cUL 60950-1 , 62368-1

V1 - 1W Unregulated Dual Separate output**PART NUMBER STRUCTURE**

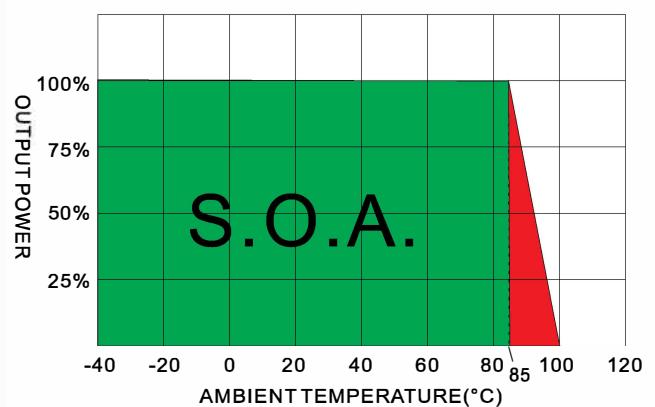
V1 - 1205D01H

Series Name

Input Voltage
05 - 5V
12 - 12V
24 - 24VCase Type
S - SIP Case
D - DIP Case3KVdc Isolation
Optional, if no suffix "H"
mean 1 KVdc Isolation

Dual Separate Output Voltage (1W)

3R3S/D01 - 5V,3.3V	3R3S/D02 - 3.3V,3.3V
05S/D02 - 5V,5V	
7R2S/D01 - 5V,7.2V	7R2S/D02 - 7.2V,7.2V
09S/D01 - 5V,9V	09S/D02 - 9V,9V
12S/D01 - 5V,12V	12S/D02 - 12V,12V
15S/D01 - 5V,15V	15S/D02 - 15V,15V
18S/D01 - 5V,18V	18S/D02 - 18V,18V
24S/D01 - 5V,24V	24S/D02 - 24V,24V

Derating Curve**MODEL SELECTION GUIDE**

MODEL NUMBER	INPUT Voltage Range	INPUT Current		OUTPUT Voltage(Vdc) Output1 Output2	OUTPUT Current Full load(mA) Output1 Output2	EFFICIENCY @FL (%,typ.)	Capacitor Load @FL (μF,max.)
		No-Load (mA ,max.)	Full Load (mA ,typ.)				
V1-053R3S/D01	5	25	259	5 , 3.3	100 , 152	77	100
V1-057R2S/D01	5	25	266	5 , 7.2	100 , 69	75	100
V1-0509S/D01	5	25	259	5 , 9	100 , 56	77	100
V1-0512S/D01	5	25	259	5 , 12	100 , 42	77	100
V1-0515S/D01	5	25	256	5 , 15	100 , 33	78	100
V1-123R3S/D01	12	15	106	5 , 3.3	100 , 152	78	100
V1-127R2S/D01	12	15	111	5 , 7.2	100 , 69	75	100
V1-1209S/D01	12	15	108	5 , 9	100 , 56	77	100
V1-1212S/D01	12	15	92	5 , 12	100 , 42	80	100
V1-1215S/D01	12	15	106	5 , 15	100 , 33	78	100
V1-243R3S/D01	24	8	55	5 , 3.3	100 , 152	75	100
V1-247R2S/D01	24	8	55	5 , 7.2	100 , 69	75	100
V1-2409S/D01	24	8	54	5 , 9	100 , 56	77	100
V1-2412S/D01	24	8	53	5 , 12	100 , 42	78	100
V1-2415S/D01	24	8	53	5 , 15	100 , 33	78	100

Suffix "H" means 3 KVdc isolation

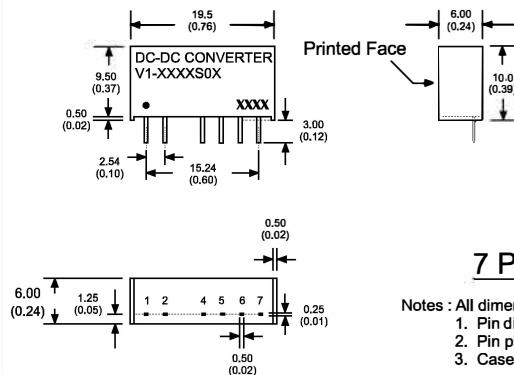
V1 - 1W Unregulated Dual Separate output

MODEL NUMBER	INPUT Voltage Range	INPUT Current		OUTPUT Voltage(Vdc) Output1 Output2	OUTPUT Current Full load(mA) Output1 Output2	EFFICIENCY @FL (% ,typ.)	Capacitor Load @FL (μ F ,max.)
		No-Load (mA ,max.)	Full Load (mA ,typ.)				
V1-0505S/D02	5	25	266	5 , 5	100 , 100	75	100
V1-057R2S/D02	5	25	259	7.2 , 7.2	69 , 69	77	100
V1-0509S/D02	5	25	253	9 , 9	56 , 56	79	100
V1-0512S/D02	5	25	250	12 , 12	42 , 42	80	100
V1-0515S/D02	5	25	243	15 , 15	33 , 33	82	100
V1-1205S/D02	12	15	111	5 , 5	100 , 100	75	100
V1-127R2S/D02	12	15	108	7.2 , 7.2	69 , 69	77	100
V1-1209S/D02	12	15	108	9 , 9	56 , 56	77	100
V1-1212S/D02	12	15	104	12 , 12	42 , 42	80	100
V1-1215S/D02	12	15	102	15 , 15	33 , 33	81	100
V1-2405S/D02	24	8	55	5 , 5	100 , 100	75	100
V1-247R2S/D02	24	8	54	7.2 , 7.2	69 , 69	77	100
V1-2409S/D02	24	8	52	9 , 9	56 , 56	79	100
V1-2412S/D02	24	8	50	12 , 12	42 , 42	82	100
V1-2415S/D02	24	8	50	15 , 15	33 , 33	82	100

Suffix "H" means 3 KVdc isolation

NOTE

- 1.Ripple/Noise measured with 20MHz bandwidth.
- 2.Tested by minimal Vin and constant resistive load.
- 3.Measured Input reflected ripple current with a simulated source inductance of 12uH and a source capacitor Cin(47 μ F, ESR<1.0 Ω at 100KHz).
- 4.Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
- 5.Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.

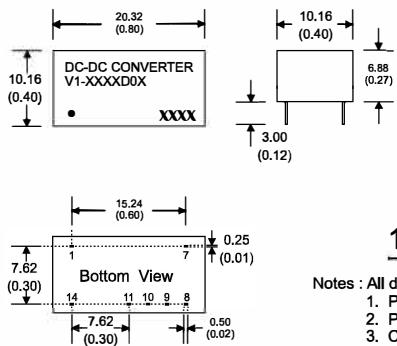
V1 - 1W Unregulated Dual Separate output**MECHANICAL SPECIFICATIONS****7 Pin SIL Package**

Notes : All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	Dual Separate
1	+V Input
2	-V Input
4	+V1 Output
5	-V1 Output
6	+V2 Output
7	-V2 Output

(The Pin Connection of high isolation one is the same with normal one.)

**14 Pin DIL Package**

Notes : All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	Dual Separate
1	-V Input
7	N.C
8	-V2 Output
9	+V2 Output
10	-V1 Output
11	+V1 Output
14	+V Input

(The Pin Connection of high isolation one is the same with normal one.)