

VV-10W Series

10W 4:1 Regulated Single & Dual output



electronic powersolutions

Features

- Wide 4:1 Input Range
- Full SMD Technology
- 1600 VDC Isolation
- Efficiency up to 88%
- -40 ~ 85 °C Operation Temperature Range
- No Minimum Load Required
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Load Protection
- Low no load Input Current
- Soft Start
- High Power Density: 10W in DIL-24 Package
- Remote On/Off



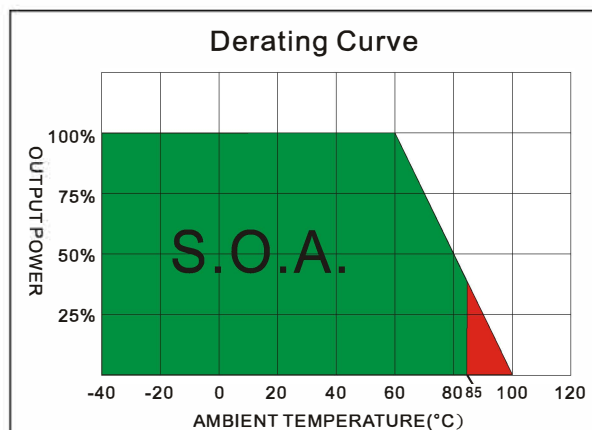
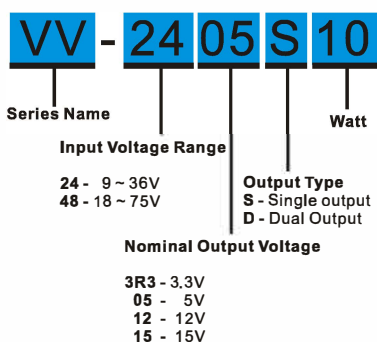
The VV series are high performance 10W single & dual output DC-DC converters. These converters are consisted with nickle-coated copper 24-pin DIL package with high performance features such as synchronous rectification, high efficiency and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5, 12, 15, ± 5 , ± 12 , ± 15 Vdc. Features include high efficiency operation up to 88%.

ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED.

OUTPUT SPECIFICATIONS		GENERAL SPECIFICATIONS	
Output Voltage Accuracy	$\pm 1.2\%$	Efficiency	See table, min.
Maximum Output Current	See table	I/O Isolation Voltage(60sec)	
Line Regulation	$\pm 0.2\%$, max.	Input/Output	1600Vdc
Load Regulation (0% Load to Full Load) Singe	$\pm 0.5\%$, max.	Case/Input & Output	1600Vdc
Load Regulation (0% Load to Full Load) Dual	$\pm 1.0\%$, max.	Isolation Resistance	1000 M Ω , min.
Cross Regulation (Dual Output) (1)	$\pm 5\%$	Isolation Capacitance	1500 pF, max.
Ripple&Noise (2)	85mVpk-pk, max.	Switching frequency	270kHz, typ.
		Humidity	95% rel H
Over Voltage Protection	3.3V output 3.9V	Reliability Calculated MTBF(MIL-HDBK-217 F)	>1 Mhrs
(Zener diode clamp)	5.1V output 6.2V	Safety Standard	UL/cUL 60950-1 , 62368-1
	12V output 15V		IEC/EN 60950-1 , 62368-1
	15V output 18V	Safety Approvals	UL/cUL 60950-1 , 62368-1
	± 5 V output ± 6.2 V		IEC/EN 60950-1 , 62368-1
	± 12 V output ± 15 V		
	± 15 V output ± 18 V		
Over Load Protection	170% of FL,typ.	EMC CHARACTERISTICS	
Short Circuit Protection	Indefinite(hiccup) (Automatic Recovery)	Radiated Emissions	EN55032 CLASSA
Temperature Coefficient	$\pm 0.02\%/^{\circ}\text{C}$	Conducted Emissions(5)	EN55032 CLASSA
Capacitive Load (3)	See table	ESD	IEC61000-4-2 Perf. Criteria A
Transient Recovery Time (4)	250us, typ.	RS	IEC61000-4-3 Perf. Criteria A
Transient Response Deviation(4)	$\pm 3\%$, max.	EFT (6)	IEC61000-4-4 Perf. Criteria A
		Surge (6)	IEC61000-4-5 Perf. Criteria A
		CS	IEC61000-4-6 Perf. Criteria A
		PFMF	IEC61000-4-8 Perf. Criteria A
INPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Input Voltage Range	See table	Case Material	Copper with nickel plated
Start up Time	20mS, typ.	Base Material	Non-conductive black plastic (UL94V-0 rated)
(Nominal Vin and constant resistive load)		Pin Material	$\Phi 0.5$ mm Brass Solder-coated
Input Filter	PI Type	Potting Material	Epoxy (UL94V-0 rated)
Input Current(No-Load)	See table, max.	Weight	18.0g
Input Current(Full-Load)	See table, typ.	Dimensions	1.25"x0.8"x0.40"
Input Reflected Ripple Current	20mApk-pk		
Remote On/Off (CTRL)		ABSOLUTE SPECIFICATIONS (7)	
ON: 3.0 ... 12Vdc or open circuit		These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
OFF: 0 ... 1.2Vdc or Short circuit pin1 and pin 2/3		Input Surge Voltage(100mS)	24 Models 50Vdc, max.
OFF idle current: 5.0 mA typ.			48 Models 100Vdc, max.
		Soldering Temperature	260°C. max.
		(1.5mm from case 10sec max.)	
ENVIRONMENTAL SPECIFICATIONS			
Operating Ambient Temperature	-40°C ~ +85°C(See Derating Curve)		
	-40°C ~ +60°C(For 100% load)		
Maximum Case Temperature	105°C		
Storage Temperature	-55°C ~ +125°C		
Cooling	Nature Convection		

VV - 10W 4:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

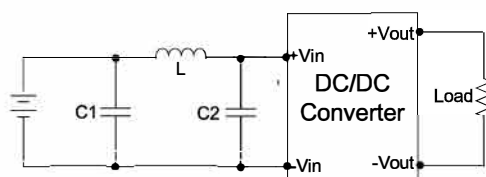


MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @FL (µF , max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VV-243R3S10	9-36	15	440	3.3	0	2700	85	1330
VV-2405S10	9-36	15	480	5	0	2000	87	1330
VV-2412S10	9-36	15	475	12	0	833	88	288
VV-2415S10	9-36	15	475	15	0	667	88	200
VV-2405D10	9-36	15	495	±5	0	±1000	85	±900
VV-2412D10	9-36	15	480	±12	0	±417	87	±133
VV-2415D10	9-36	15	480	±15	0	±330	87	±90
VV-483R3S10	18-75	15	225	3.3	0	2700	84	1330
VV-4805S10	18-75	15	240	5	0	2000	87	1330
VV-4812S10	18-75	15	240	12	0	833	87	288
VV-4815S10	18-75	15	240	15	0	667	87	200
VV-4805D10	18-75	15	250	±5	0	±1000	85	±900
VV-4812D10	18-75	15	240	±12	0	±417	88	±133
VV-4815D10	18-75	15	240	±15	0	±330	88	±90

NOTE

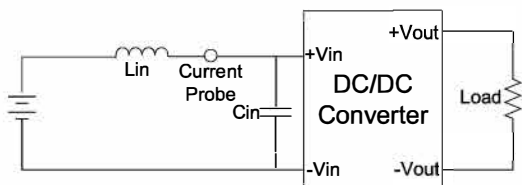
- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Measured with 20MHz bandwidth and 1.0µF ceramic capacitor.
- Tested by minimal Vin and constant resistive load.
- Tested by normal Vin and 25% load step change (75%-50%-25% of Io).
- Input filter components (C1, L, C2) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.
- An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5. The filter capacitor suggest: Nippon - chemi - con KY series, 330µF/100V.
- Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.



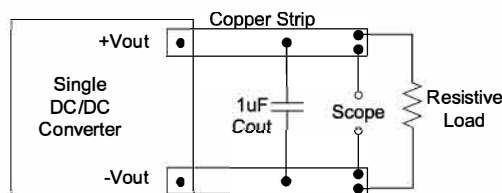
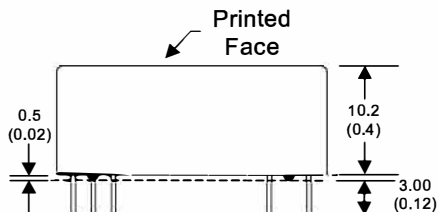
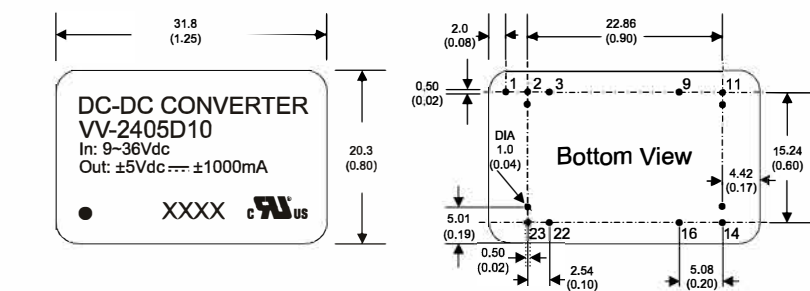
	C1	L	C2
VV-24XXXXX	2.2µF, 100V	12µH	2.2µF, 100V
VV-48XXXXX	2.2µF, 100V	12µH	2.2µF, 100V

TEST CONFIGURATIONS
Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12uH) and a source capacitor C_{in} (47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.


Output Ripple & Noise Measurement Test

Use a capacitor C_{out} (1.0uF) measurement. The Scope measurement bandwidth is 0-20MHz.


MECHANICAL SPECIFICATIONS

**24 Pin DIL Package
Nickel-Coated Copper**

- All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)
 4. Stand-off tolerance: ± 0.1 (± 0.004)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
1	Remote On/Off	Remote On/Off
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input