

40 WATTS

SINGLE/MULTI OUTPUT AC-DC

FEATURES:

- Compact 2.5" x 4.25" x 1.2" Size
- 2 Year Warranty
- Universal 85-264V Input
- One to Four Outputs
- 0-70°C Operating Temperature
- IEC 60601-1 3rd ed. Medical Cert.
- IEC 62368-1 2nd ed. Certification
- IEC 60601-1-2 4th ed. EMC
- Class B Emissions per EN55011/32
- RoHS Compliant
- Optional Chassis/Cover



CHASSIS/COVER



OPEN FRAME

SAFETY SPECIFICATIONS

UL Underwriters Laboratories
File E137708/E140259

UL 62368-1:2014, 2nd Edition
CAN/CSA-C22.2 No. 62368-1-14
AAMI/ANSI ES60601-1:2005/(R) 2012
CAN/CSA-C22.2 No. 60601-1:2014



CB Reports/Certificates (including all National and Group Deviations)

IEC 62368-1:2014, 2nd Edition
IEC 60601-1:2005/A1:2012



TUV SUD America

EN 62368-1:2014, 2nd Edition
EN 60601-1:2006/A1:2013



Low Voltage Directive
RoHS Directive (Recast)

(2014/35/EU of February 2014)
(2015/863/EU of March 2015)



Electrical Equipment (Safety) Regulations 2016 SI No. 1101
Restriction of the Use of Certain Hazardous Substances in EEE Regulations
2012 SI No. 3032 + 2019 SI No.492

MODEL LISTING

MODEL NO. OUTPUT 1 OUTPUT 2 OUTPUT 3 OUTPUT 4

| | | | | |
|--------------|-------------|-------------|------------|--------------|
| SRP-40A-4001 | +3.3V/5A | +5V/3A | +12V/0.7A | -12V/0.7A |
| SRP-40A-4002 | +5V/5A | +3.3V/3A | +12V/0.7A | -12V/0.7A |
| SRP-40A-4003 | +5V/5A | -5V/3A | +12V/0.7A | -12V/0.7A |
| SRP-40A-4004 | +5V/5A | -5V/3A | +15V/0.7A | -15V/0.7A |
| SRP-40A-4005 | +5V/5A | +24V/1.5A | +12V/0.7A | -12V/0.7A |
| SRP-40A-4006 | +5V/5A | +24V/1.5A | +15V/0.7A | -15V/0.7A |
| SRP-40A-4007 | +3.3V/3.1A | +5V/1.25A | -24V/1.27A | -51.6V/1.25A |
| SRP-40A-3001 | +5V/5A | +12V/2A | -12V/0.7A | |
| SRP-40A-3002 | +5V/5A | +15V/2A | -15V/0.7A | |
| SRP-40A-3003 | +24V/1.5A | | +15V/0.7A | -15V/0.7A |
| SRP-40A-3004 | +14.5V/1.5A | -14.5V/1.5A | +5V/1A | |
| SRP-40A-2001 | +5V/5A | +24V/1.5A | | |
| SRP-40A-2002 | +5V/5A | +12V/3A | | |
| SRP-40A-2003 | +5V/5A | -5V/4A | | |
| SRP-40A-2004 | +12V/3A | -12V/3A | | |
| SRP-40A-2005 | +15V/2.5A | -15V/2A | | |
| SRP-40A-2006 | +30V/1.2A | | -15V/0.7A | |
| SRP-40A-2007 | +3.3V/5A | | +5V/0.7A | |
| SRP-40A-2008 | +6V/5A | +9V/1A | | |
| SRP-40A-2009 | +30V/0.5A | -30V/0.5A | | |
| SRP-40A-1001 | 3.3V/10A | | | |
| SRP-40A-1002 | 5V/8A | | | |
| SRP-40A-1003 | 12V/3.33A | | | |
| SRP-40A-1004 | 15V/2.67A | | | |
| SRP-40A-1005 | 24V/1.67A | | | |
| SRP-40A-1006 | 48V/0.83A | | | |
| SRP-40A-1007 | 9V/4.45A | | | |
| SRP-40A-1008 | 12V/3.33A | | | |

ORDERING INFORMATION

Consult factory for alternate output configurations.
Consult factory for positive, negative or floating Output 2.
Specify DC Input when ordering SRP-40A-3003 only.
Please specify the following optional features when ordering:
CH – Chassis I/O – Isolated Outputs
CO – Cover TS – Terminal Strip

SRP-40A

OUTPUT SPECIFICATIONS

| | |
|---|--|
| Total Output Power at 50°C ₍₁₎ (See Derating Chart) | 40W (33W, 1001) |
| Output Voltage Centering | Output 1: ± 0.25% (All outputs at 50% load) Output 2: ± 5.0% Output 3: ± 3.0% Output 4: ± 3.0% |
| Output Voltage Adjust Range | Output 1: 95 - 105% |
| Load Regulation | Output 1: 0.5% (10-100% load change) Output 2: 5.0% (30-100% load change) (2003,4002) Output 3: 0.5% (10-100% load change) Output 4: 0.5% (10-100% load change) |
| Source Regulation | Outputs 1 – 4: 0.5% |
| Cross Regulation | Output 2: 5.0% (Output 1 varied 50-100%) Output 3: 0.5% Output 4: 0.5% |
| Output Noise | Outputs 1 - 4: 1.0% |
| Turn on Overshoot | None |
| Transient Response | Outputs 1 – 4 |
| Voltage Deviation | 5.0% |
| Recovery Time | 2 ms |
| Load Change | 50% to 100% |
| Output Overvoltage Protection | Output 1: 110% to 150% |
| Output Overcurrent Protection | Outputs 3 & 4: 110% Min. |
| Output Overpower Protection | Outputs 1 & 2: 110% Min. Outputs cycle on/off, auto recovery |
| Hold Up Time | 10 ms min., 40 W Output, 120V Input |
| Start Up Time | 1 Second |

INPUT SPECIFICATIONS

| | |
|------------------|-------------------------------|
| Protection Class | I |
| Source Voltage | 85 – 264 Volts AC |
| Frequency Range | 47 – 63 Hz |
| Source Current | |
| True RMS | 1A at 85V Input |
| Peak Inrush | 30 A |
| Efficiency | 0.66 - 0.80 (Varies by model) |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-----------------------------|--|
| Ambient Operating | 0° C to + 70° C |
| Temperature Range | Derating: See Power Rating Chart |
| Ambient Storage Temp. Range | - 40° C to + 85° C |
| Temperature Coefficient | Outputs 1 – 4: 0.02%/°C |
| Altitude | 3,000m ASL – Operating – Medical 60601-1 5,000m ASL – Operating – ITE/AV – 62368-1 12,192m ASL – Non-Operating |

GENERAL SPECIFICATIONS


| | |
|---------------------------------------|---|
| Means of Protection | |
| Primary to Secondary | 2MOPP (Means of Patient Protection) |
| Primary to Ground | 1MOPP (Means of Patient Protection) |
| Secondary to Ground | Operational Insulation(Consult factory for 1MOPP) |
| Dielectric Strength ^(8, 9) | |
| Reinforced Insulation | 5656 VDC, Primary to Secondary |
| Basic Insulation | 2121 VDC, Primary to Ground |
| Operational Insulation | 707 VDC, Secondary to Ground |
| Leakage Current | |
| Earth Leakage | <300µA NC, <1000µA SFC |
| Touch Current | <100µA NC, <500µA SFC |
| Mean-Time Between Failures | 100,000 Hours min., MIL-HDBK-217F, 25° C, GB |
| Weight | 0.49 Lbs. Open Frame 0.85 Lbs. Chassis and Cover |

EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4TH ED./IEC 61000-6-2:2005)

| | | | |
|-----------------------------------|---------------|--|---|
| Electrostatic Discharge | EN 61000-4-2 | ±8KV contact / ±15KV air discharge | A |
| Radiated Electromagnetic Field | EN 61000-4-3 | 80MHz-2.7GHz, 10V/m, 80% AM | A |
| Electrical Fast Transients/Bursts | EN 61000-4-4 | ±2 KV, 5KHz/100KHz | A |
| Surge Immunity | EN 61000-4-5 | ±2 KV line to earth / ±1 KV line to line | A |
| Conducted Immunity | EN 61000-4-6 | 0.15 to 80MHz, 10V, 80% AM | A |
| Magnetic Field Immunity | EN 61000-4-8 | 30A/m, 60 Hz. | A |
| Voltage Dips | EN 61000-4-11 | 0% U _t , 0.5 cycles, 0-315° 100/240V A/A 0% U _t , 1 cycles, 0° 100/240V A/A 40% U _t , 10/12 cycles, 0° 100/240V B/A 70% U _t , 25/30 cycles, 0° 100/240V B/A | |
| Voltage Interruptions | EN 61000-4-11 | 0% U _t , 300 cycles, 0° 100/240V B/B | |
| Radiated Emissions | EN 55011/32 | Class B | |
| Conducted Emissions | EN 55011/32 | Class B | |
| Harmonic Current Emissions | EN 61000-3-2 | Class A | |
| Voltage Fluctuations/Flicker | EN 61000-3-3 | Compliant | |

All specifications are maximum at 25°C/40W unless otherwise stated, may vary by model and are subject to change without notice.


SRP-40A SERIES MECHANICAL SPECIFICATIONS

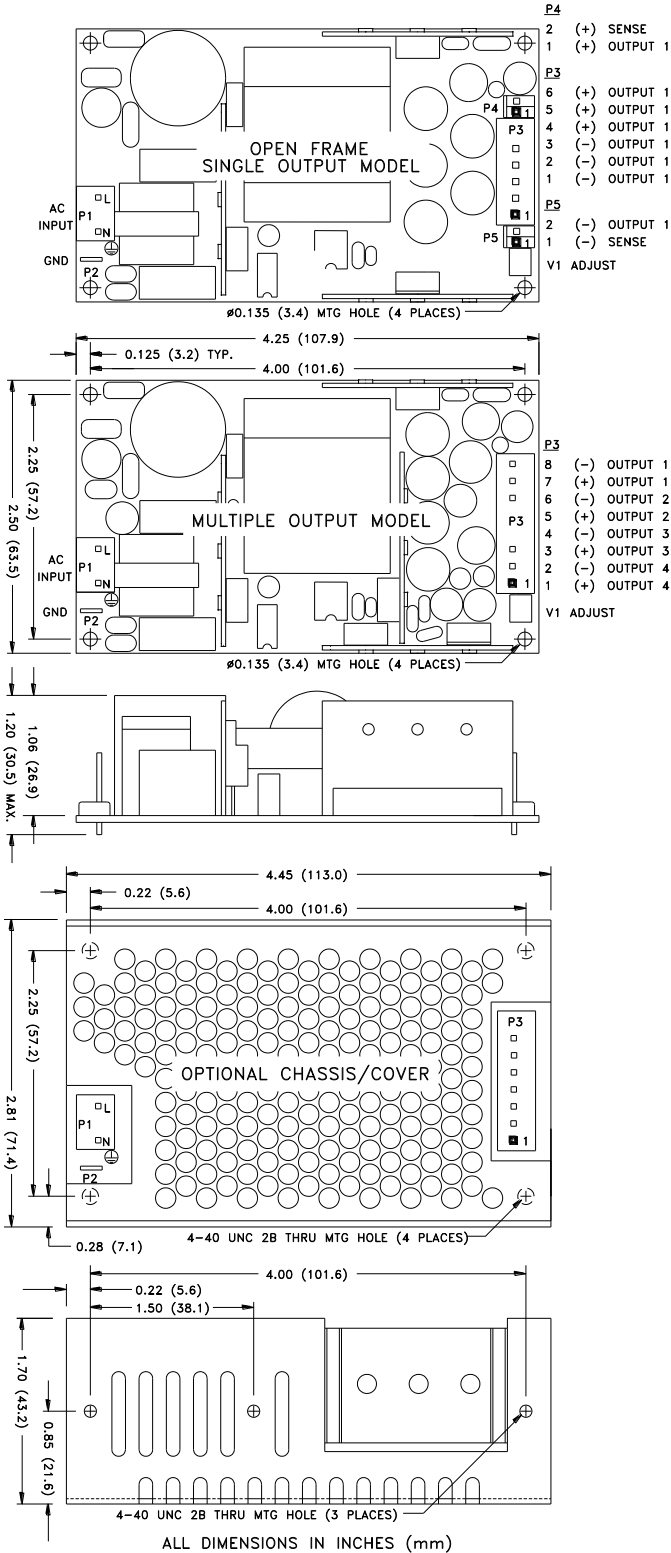

APPLICATIONS INFORMATION

- Each output can deliver its rated current but Total Output Power must not exceed 40W (33W, 1001).
- Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
- Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
- This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
- A minimum load of 10% is required on Output 1 to ensure proper regulation of remaining outputs.
- This product includes only one fuse in the input circuit. In consideration of Clause 8.11.5 of IEC 60601-1:2005, a second fuse may be required in neutral conductor of the end product.
- Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method, 20 MHz bandwidth).
- This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC 60601-1:2005. In consideration of Clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product. It is highly recommended that the DC test voltages listed in DVB.1, Annex DVB of UL 60601-1 1st Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test. Remote-Sense terminals may be used to compensate for cable losses up to 250mV, depending on model. The use of a twisted pair, decoupling capacitors, and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
- Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.250 inches.
- To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
- Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.
- Maximum Ambient Temperature is reduced to 40°C with optional Chassis and Cover. See chart below.

MAXIMUM OUTPUT POWER vs. AMBIENT TEMPERATURE

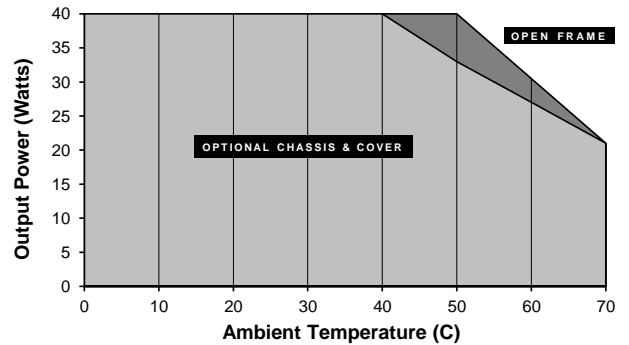

CONNECTOR SPECIFICATIONS

| | | |
|-------|----------------------|---|
| P1 | AC Input | 0.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal. |
| P3 | DC Output (Single) | 0.156 friction lock header mates with Tyco 770849-6 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal. |
| P3 | DC Output (Multiple) | 0.156 friction lock header mates with Tyco 770849-8 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal. |
| P4,P5 | Sense | 0.100 friction lock header mates with Molex 22-01-2027 or equivalent crimp terminal housing with Molex 08-50-0114 or equivalent crimp terminal. |
| G | Ground | 0.187 quick disconnect terminal. |