

AJCV150 SERIES

150 Watts

KEY FEATURES

- Universal Input Range 90-264VAC or 127-370VDC, 47-63 Hz
- Remote ON/OFF Control
- Adjustable Output Voltage
- I/O Isolation 4300VAC
- Operating Ambient Temperature Range -40°C to +85°C
- No Load Power Consumption < 0.3W
- 5000m Altitude Application
- Over-Voltage Category OVC III
- High Efficiency up to 93.5%
- Isolation Class II
- EMC Compliant without External Components
- Safety Approval to UL / IEC / EN 62368-1
- Design meet IEC / EN 61558-1, IEC / EN 61558-2-16, IEC / EN 60335-1
- 3-Year Product Warranty



ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	AJCV150-12S	AJCV150-24S	AJCV150-48S
Max Output Wattage (W)	150W		
Input	Voltage		
	90-264 VAC or 127-370 VDC (L Connect +Vin ; N Connect -Vin)		
	Frequency (Hz)		
	47-63 Hz		
	Current (Full load)		
	2 A max. (115 VAC) / 1 A max. (230 VAC)		
Output	Inrush Current (<2ms)		
	45 A max. (115 VAC) / 90 A max. (230 VAC)		
	Power Factor		
	PF>0.9 at Full Load		
	No Load Power Consumption		
	< 0.3W (115/230 VAC)		
Output	Voltage (V.DC.)		
	12V	24V	48V
	Trim		
	±5% Output Voltage		
	Voltage Accuracy		
	±2%		
	Current (A) max		
	12.5	6.25	3.125
	Line Regulation (LL-HL) (typ.)		
	±0.5%		
	Load Regulation (0-100%) (typ.)		
±1%			
Minimum Load			
0%			
Maximum Capacitive Load			
6000 uF	3000 uF	2000 uF	
Ripple & Noise (Full Load)			
120mV	200mV	240mV	
Efficiency (at 230 VAC)			
93%	93.5%	93.5%	
Hold-up Time (typ.)			
10 ms			
Protection	Over Current Protection		
	Auto recovery		
	Over Voltage Protection		
Auto recovery			
Short Circuit Protection			
Hiccup mode / Auto recovery			
Isolation	Input-Output (V.AC)		
4300V			
Environment	Operating Temperature		
	-40°C...+85°C (with derating)		
	Storage Temperature		
	-40°C...+85°C		
	Temperature Coefficient		
	±0.05%/°C		
	Altitude During Operation		
	OVC III : 5000m		
	Humidity		
95% RH			
MTBF			
>250,000 h @ 25°C (MIL-HDBK-217F)			
Over Voltage Category			
III: Compliance to EN 61558; altitude up to 2000 meters.			
Vibration			
IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)			
Shock			
IEC60068-2-27			

AJCV150 SERIES

150 Watts

ELECTRICAL SPECIFICATIONS

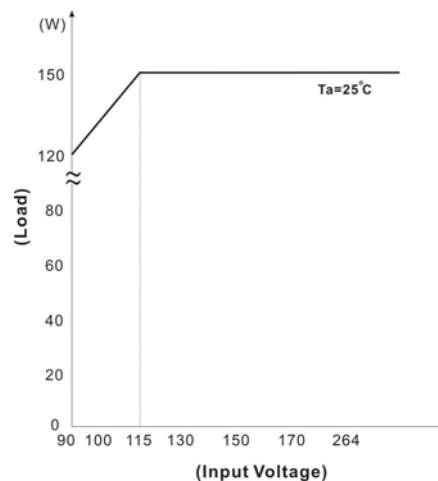
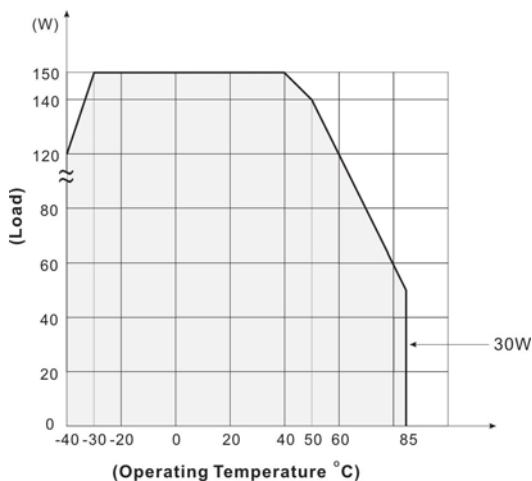
All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

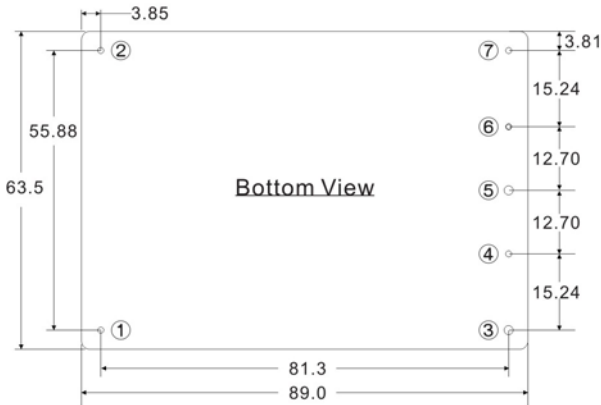
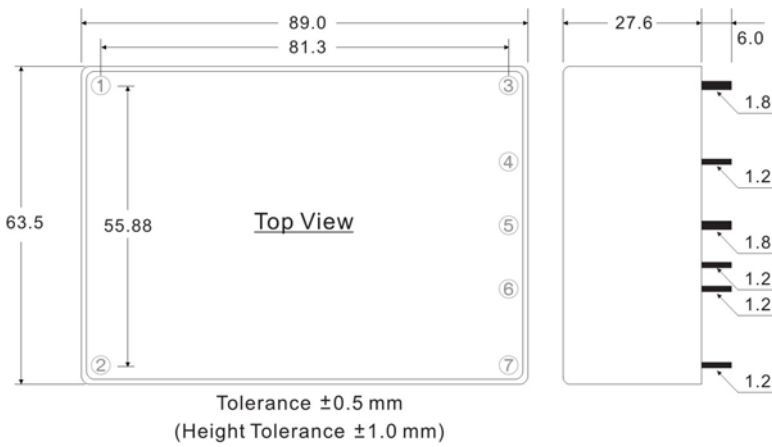

Model No.	AJCV150-12S	AJCV150-24S	AJCV150-48S
Physical	Dimensions (L x W x H)		
	3.5 x 2.5 x 1.09 Inches (89.0 x 63.5 x 27.6 mm) Tolerance ± 0.5 mm, Height Tolerance ± 1 mm		
	Case Material		
	Plastic resin (flammability to UL 94V-0)		
Safety	Weight		
	320 g		
	Cooling Method		
Free air convection			
Safety	Approval		
	UL / IEC / EN 62368-1		
EMC	Meet		
	IEC / EN 61558-1, IEC / EN 61558-2-16, IEC / EN 60335-1		
	Conducted EMI		
	EN55032 Class B		
EMC	Radiated EMI		
	EN55032 Class B		
	EMS (Noise Immunity)		
EN 55035			

NOTE

- Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
- It's recommended to add Varistor 14S561K at L / N input side in parallel.
- CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.**
(ATTENTION : 2 poles avec fusible sur le neutre. Deconnecter le secteur avant intervention.)
- Please refer to our PDF file "AC-DC Application"

DERATING



MECHANICAL DIMENSIONS (Top View)

TRIM


	R1		R2	
12S	+5%	1%	-5%	-1%
	0	~ 150K	75K	~ 680K
24S	+5%	1%	-5%	-1%
	0	~ 680K	820K	~ 6.8M
48S	+5%	1%	-5%	-1%
	0	~ 330K	1M	~ 7.5M

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions apply.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email: sales@allpsu.co.uk, Web: www.allpsu.co.uk