

ATCW40 SERIES
40 Watts
KEY FEATURES

- Universal Input Range 90-330VAC, 47-440 Hz
- I/O Isolation 5700VAC
- Operating Ambient Temperature Range -40°C to +70°C
- No Load Power Consumption < 0.1W (except 48S)
- Over-Voltage Category OVC IV
- High Efficiency up to 89%
- Isolation Class II
- EMC Compliant without External Components
- Safety Approval to UL / IEC / EN 62368-1
- 3-Year Product Warranty


ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	ATCW40-5S	ATCW40-12S	ATCW40-15S	ATCW40-24S	ATCW40-48S	
Max Output Wattage (W)	35W	40W				
Input	Voltage	90-330 VAC or 120-450 VDC				
	Frequency (Hz)	47-440 Hz				
	Current (Full load)	1000 mA max. (115 VAC) / 500 mA max. (230 VAC)				
	Inrush Current (<2ms)	60 A max. (115 VAC) / 100 A max. (230 VAC)				
	Leakage Current	0.25 mA max. (100-240 VAC)				
	No Load Power Consumption (115 / 230 VAC)	< 0.1W				< 0.15W
Output	Voltage (V.DC.)	5V	12V	15V	24V	48V
	Voltage Accuracy	±2%				
	Current (mA) max	7000	3333	2666	1666	833
	Line Regulation (LL-HL) (typ.)	±0.5%				
	Load Regulation (0-100%) (typ.)	±1%				
	Minimum Load	0%				
	Maximum Capacitive Load	8000 uF	6000 uF	5000 uF	1200 uF	330 uF
	Ripple & Noise (Full Load)	120mV		150mV	240mV	480mV
	Efficiency (at 230 VAC)	87%	89%	89%	88%	88%
	Hold-up Time (typ)	30 ms (at 230VAC)				
Protection	Over Power Protection	Auto recovery				
	Over Voltage Protection	Zener diode clamp				
	Short Circuit Protection	Hiccup mode (automatic recovery)				
Isolation	Input-Output (V.AC)	5700V				
Environment	Operating Temperature	-40°C...+70°C (with derating)				
	Storage Temperature	-40°C...+70°C				
	Temperature Coefficient	±0.05%/°C				
	Altitude During Operation (UL / IEC / EN 62368-1)	2000m				
	Humidity	95% RH				
	MTBF	>300,000 h @ 25°C (MIL-HDBK-217F)				
	Over Voltage Category	IV: Compliance to EN 62368.				
	Vibration	IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)				
Shock	IEC60068-2-27					
Physical	Dimensions (L x W x H)	2.52 x 1.8 x 0.93 Inches (64.1 x 45.6 x 23.5 mm) Tolerance ±0.5 mm, Height Tolerance ±1 mm				
	Case Material	Plastic resin (flammability to UL 94V-0)				
	Weight	125 g				
	Cooling Method	Free air convection				
Safety	Approval	UL / IEC / EN 62368-1				
EMC	EMI (Conducted & Radiated Emission)	EN 55032 class B				
	EMS (Noise Immunity)	EN 55035				


ATCW40 SERIES

40 Watts

NOTE


1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.
(ATTENTION : 2 poles avec fusible sur le neutre. Deconnecter le secteur avant intervention.)
3. Please refer to our PDF file "AC-DC Application"

MECHANICAL DIMENSIONS (Top View)

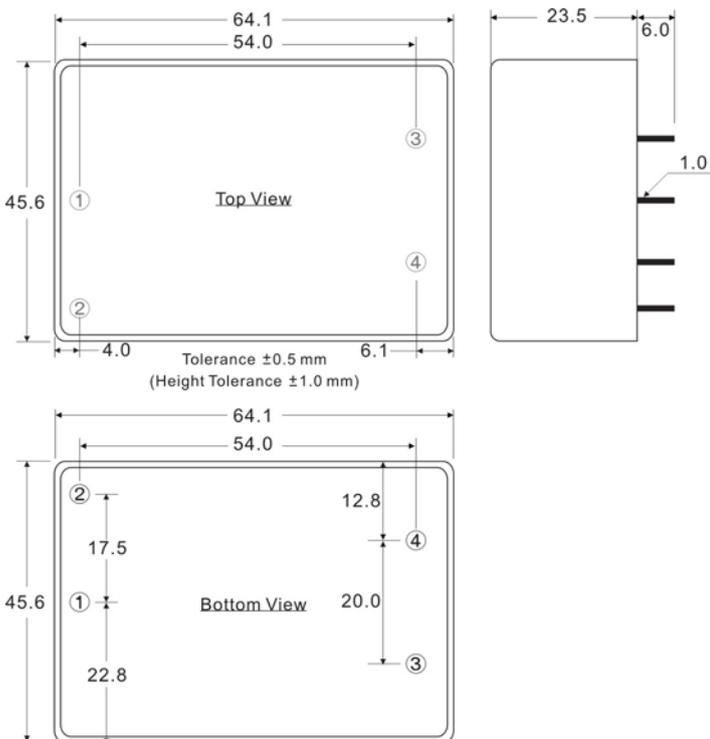


PIN#	Single
1	AC IN (N)
2	AC IN (L)
3	-DC OUT
4	+DC OUT

DERATING

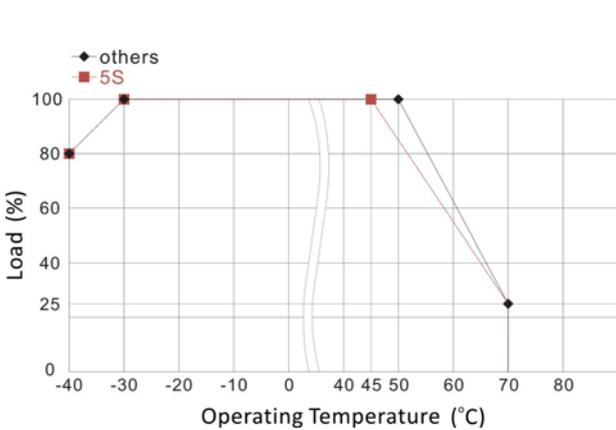

Derating Load versus Input Voltage

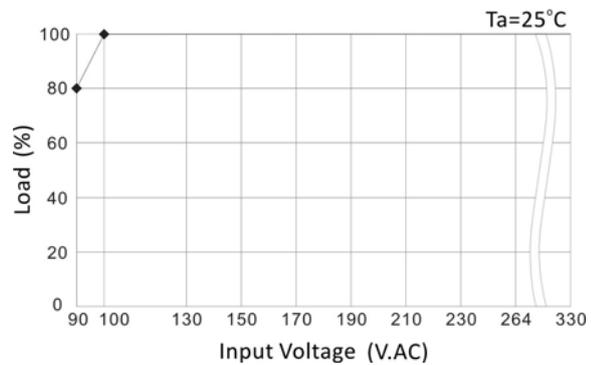

Specifications are subject to change without notice, E&OE. ALL PSU Terms & Conditions apply.

ALL PSU Ltd, Unit D6 Laser Quay, Culpeper Close, Medway City Estate,
Rochester, Kent, ME2 4HU, Tel : 01634 725527, Fax : 01634 739111
Email: sales@allpsu.co.uk, Web: www.allpsu.co.uk