



electronicpower solutions

EC2SAW8 SERIES 2 WATT 8:1 INPUT ISOLATED DC-DC CONVERTER

Features

- Efficiency up to 86%
- Fixed Switching Frequency
- Negative Remote On/Off
- Low No Load Power Consumption
- Fully Protected (OCP/UVLO)
- 3000Vdc I/O Isolation
- Safety Meets IEC/EN/UL 62368-1
- 5000m Operating Altitude



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT 48V _{in} (TYP.)		% EFF (TYP.)			CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	12V _{in}	24V _{in}	48V _{in}	
EC2SAW8-48S33N	9-75 VDC	3.3 VDC	0 mA	500 mA	5 mA	45 mA	79	79	77	500uF
EC2SAW8-48S05N	9-75 VDC	5 VDC	0 mA	400 mA	5 mA	52 mA	82	82	80	400uF
EC2SAW8-48S12N	9-75 VDC	12 VDC	0 mA	167 mA	8 mA	51 mA	85	85	82	167uF
EC2SAW8-48S15N	9-75 VDC	15 VDC	0 mA	134 mA	8 mA	50 mA	85	86	83	134uF
EC2SAW8-48D05N	9-75 VDC	±5 VDC	0 mA	±200 mA	8 mA	52 mA	82	82	80	200uF
EC2SAW8-48D12N	9-75 VDC	±12 VDC	0 mA	±83 mA	8 mA	51 mA	84	84	82	83uF
EC2SAW8-48D15N	9-75 VDC	±15 VDC	0 mA	±67 mA	8 mA	51 mA	84	84	82	67uF

NOTE:

1. Nominal input voltage 12V_{dc}, 24V_{dc} or 48V_{dc}.

PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Remote On/Off Logic
EC2SAW8-	II	O	XX	L
EC2SAW8	48 : 48 VDC	S : Single D : Dual	33 : 3.3VDC 05 : 5.0VDC 12 : 12VDC 15 : 15VDC 05 : ±5.0 VDC 12 : ±12 VDC 15 : ±15 VDC	N : Negative

Part Number Example:

EC2SAW8-48S12N: 2W, 8:1 9-75Vdc Input, Single 12Vdc Output, Negative Logic

**TECHNICAL SPECIFICATIONS**

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3		75	V _{dc}
Input Surge Voltage	100ms max.	All			100	V _{dc}
Operating Temperature	With de-rating, above 85°C	All	-40		105	°C
Operating Case Temperature	At the center part of case plate	All	-40		110	°C
Storage Temperature		All	-55		125	°C

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		All	9	48	75	V _{dc}
Input Under Voltage Protection						
Turn-On Voltage Threshold	100% Load	All	7.6	8.1	8.6	V _{dc}
Turn-Off Voltage Threshold	100% Load	All	7.0	7.5	8.0	V _{dc}
Lockout Hysteresis Voltage	100% Load	All		0.6		V _{dc}
Maximum Input Current	V _{in} =9V _{dc} , Full load	All		320		mA
No-Load Input Current	V _{in} =48V _{dc} , I _o =0A	See Model Number Table				mA
Input Filter	Capacitive	All				
Inrush Current (I ² t)	As per ETS300 132-2	All			0.1	A ² s
Input Reflected Ripple Current	V _{in} =Nominal, L=12uH, Load=Full load	All		30		mA

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	V _{in} =48V _{dc} , Full load, T _c =25°C	All	-1.5		+1.5	%
Output Voltage Balance	V _{in} =48V _{dc} , Full load, T _c =25°C	±5Vo others	-2.0 -1.0		+2.0 +1.0	%
Output Voltage Regulation						
Load Regulation	Full load to no load	Single Dual			±0.5 ±1.0	%
Line Regulation	V _{in} =High line to low line, full load	All			±0.5	%
Cross Regulation	Asymmetrical load 25%/100%	Dual			±5	%
Temperature Coefficient	T _c =-40°C to 85°C	All		±0.03		%/°C
Output Voltage Ripple and Noise (20MHz bandwidth)						
Peak-to-Peak	Full load, T _c =25°C	All			75	mV
Output Current Range	V _{in} = 9 to 75V _{dc}	See Model Number Table				A
Over Current Protection	Hiccup mode. Auto recovery	All	110		230	%
Short Circuit Protection		All	Continuous, Auto Recovery			
External Load Capacitance	Full load (resistive)	See Model Number Table				uF

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	V _{in} =12V _{dc} , 24V _{dc} , 48V _{dc}	See Model Number Table				%

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	75% to 100% of I _{o,max} . step load change d _i /d _t =0.1A/us	All			±5	%
Recovery Time	(within 1% V _{out} nominal)	All			250	us



EC2SAW8 Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Turn-On Delay and Rise Time	Full load (Constant resistive load)					
Turn-On Delay Time, From On/Off Control	$V_{on/off}$ to 10% V_{o_set} , Remote on	All		10		ms
Turn-On Delay Time, From Input	$V_{in_min.}$ to 10% V_{o_set} , Power up	All		10		ms
Output Voltage Rise Time	10% V_{o_set} to 90% V_{o_set}	All		3		ms

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage (100% factory Hi-Pot tested @2sec.)	1 Minute; Input to output	All			3000	V_{dc}
Isolation Resistance	Input to output	All	1000			MΩ
Isolation Capacitance	Input to output	All		1000		pF

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse frequency modulation (PWM), fixed	All		450		KHz
On/Off Control, Negative Remote On/Off Logic, Refer to -Vin Pin						
Logic Low (Module Off)	$V_{on/off}$ at $I_{on/off}$	All	5.5		15	V_{dc}
Logic High (Module On)	< 1.2 V_{dc} and open circuit	All	0		1.2	V_{dc}
Off Converter Input Current	Shutdown input idle current	All			1	mA

GENERAL SPECIFICATIONS


PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ of $I_{o_max.}$; MIL-HDBK - 217F_Notice 1, GB, 25°C	3.3Vo		3529		K hours
		5Vo		3073		
		12Vo		3563		
		15Vo		3389		
		±5Vo		3604		
		±12Vo		3326		
		±15Vo		3069		
Weight		All		4.8		grams
Case Material	Non-conductive black plastic, UL 94V-0					
Potting Material	UL 94V-0					
Pin Material	Base: Copper Plating: Nickel and Bright Tin					
Shock/Vibration	MIL-STD-810F Compliant					
Humidity	95% RH max. Non condensing					
Altitude	5000m Operating altitude, 12000m Transport altitude					
Thermal Shock	MIL-STD-810F					

EMC SPECIFICATIONS (External components required, please refer to application note.)





EMI Conduction	Meets EN 55032 Class A & Class B (with external filter)		
EMI Radiation	Meets EN 55032 Class A (without external filter), Meets EN 55032 Class B (with external filter)		
ESD	Meets EN 61000-4-2	Level 2: Air ±8kV, Contact ±4kV	Perf. Criteria A
Radiated Immunity	Meets EN 61000-4-3	Level 2: 80~1000MHz, 3V/m	Perf. Criteria A
Fast Transient	Meets EN 61000-4-4	Level 2: On power input port, ±0.5kV, external input TVS required	Perf. Criteria A
Surge	Meets EN 61000-4-5	Level 2: Line to line, ±0.5kV, external input TVS required	Perf. Criteria A
Conducted Immunity	Meets EN 61000-4-6	Level 2: 0.15~80MHz, 3V	Perf. Criteria A
Application Note Link		EC2SAW8 Series App Notes	
Packaging Information Link		Packaging Information	

CHARACTERISTIC CURVE

Power Derating Curve

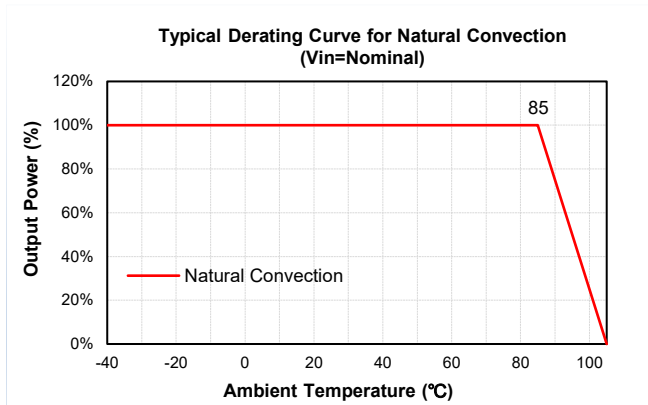


Performance Data

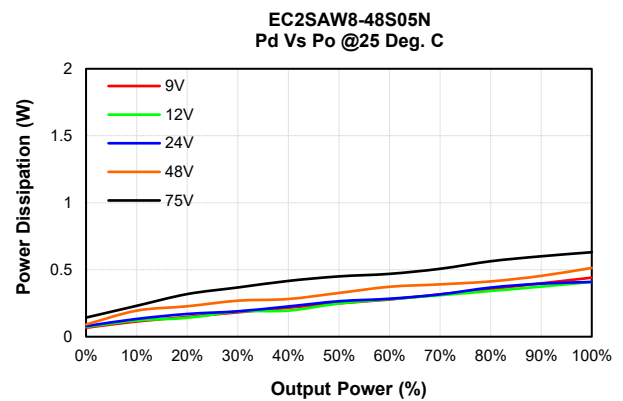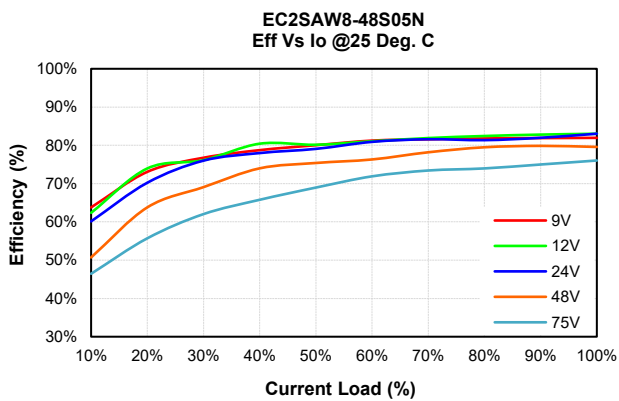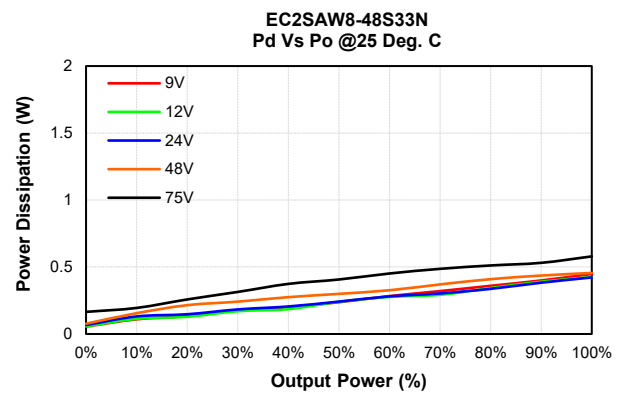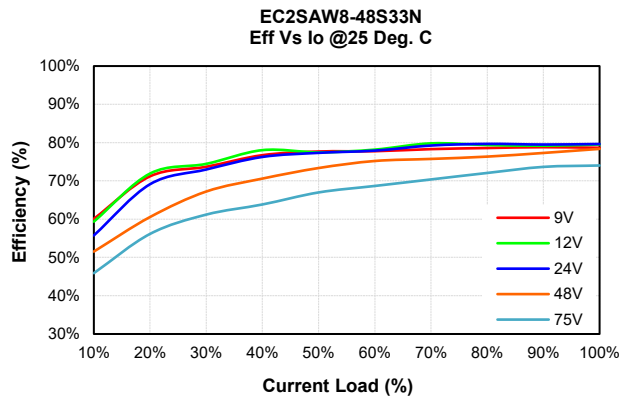


EC2SAW8 Series


EC2SAW8-48S12N
Eff Vs Io @25 Deg. C

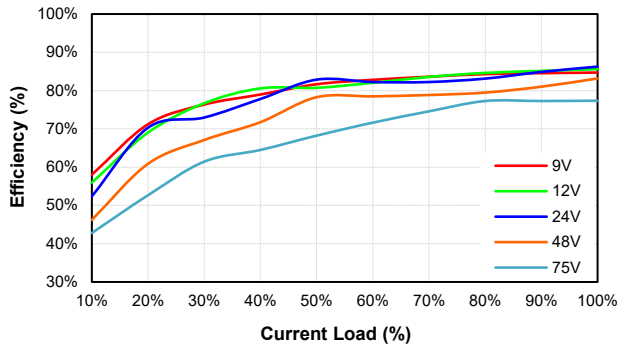


EC2SAW8-48S12N
Pd Vs Po @25 Deg. C

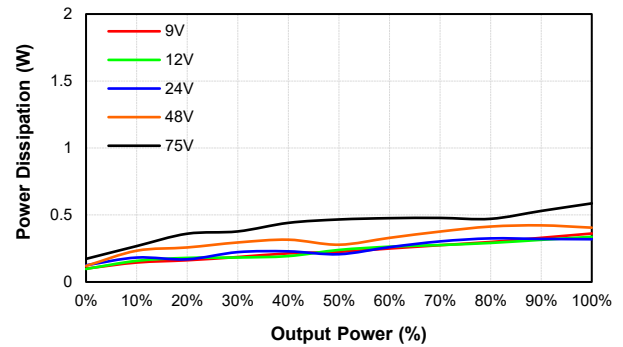


EC2SAW8-48S15N
Eff Vs Io @25 Deg. C

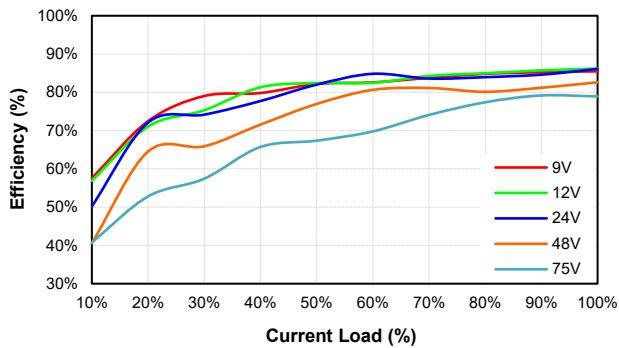


EC2SAW8-48S15N
Pd Vs Po @25 Deg. C

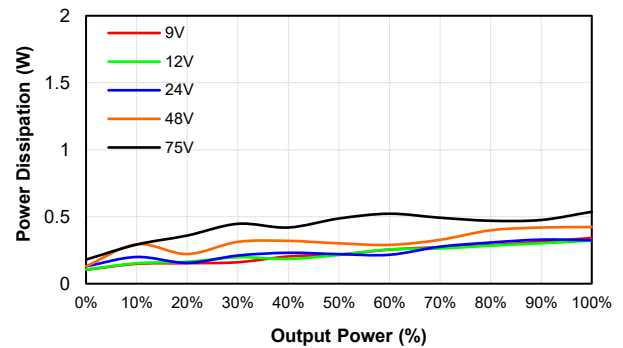


EC2SAW8-48D05N
Eff Vs Io @25 Deg. C

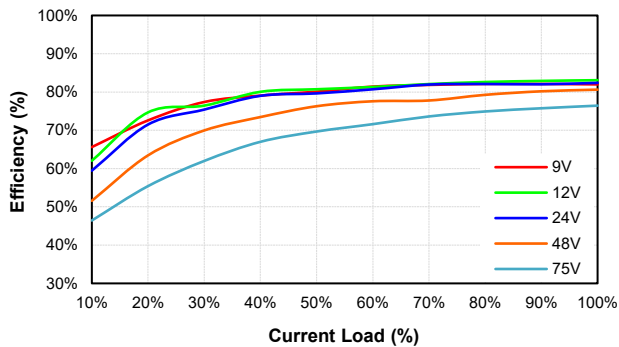


EC2SAW8-48D05N
Pd Vs Po @25 Deg. C

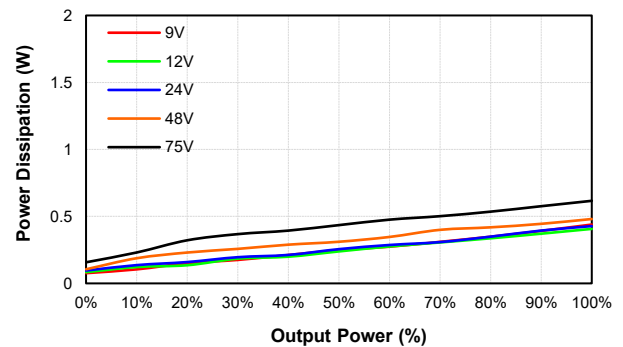



EC2SAW8-48D12N
Eff Vs Io @25 Deg. C

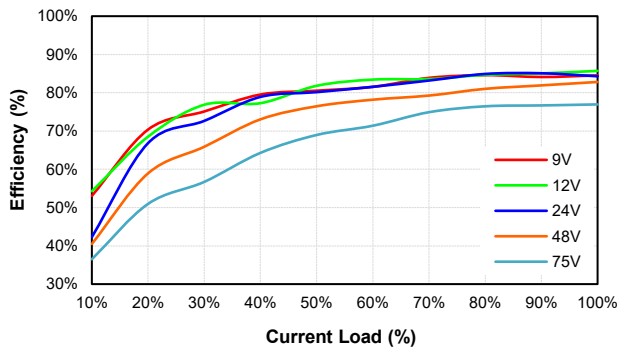

EC2SAW8-48D12N
Pd Vs Po @25 Deg. C

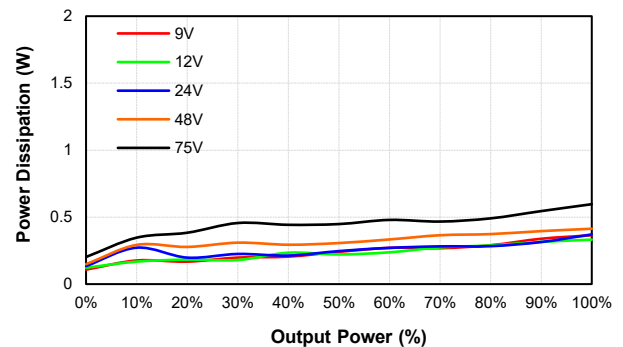


EC2SAW8 Series

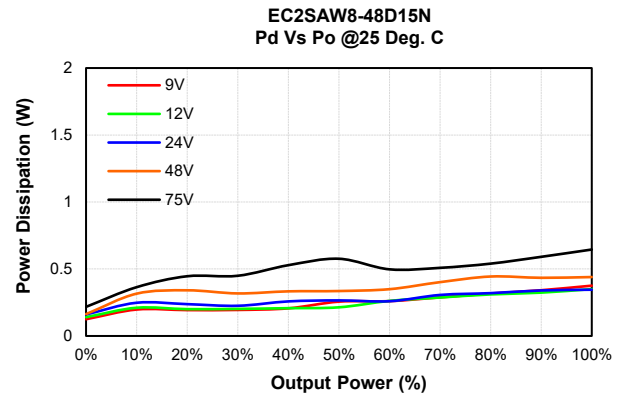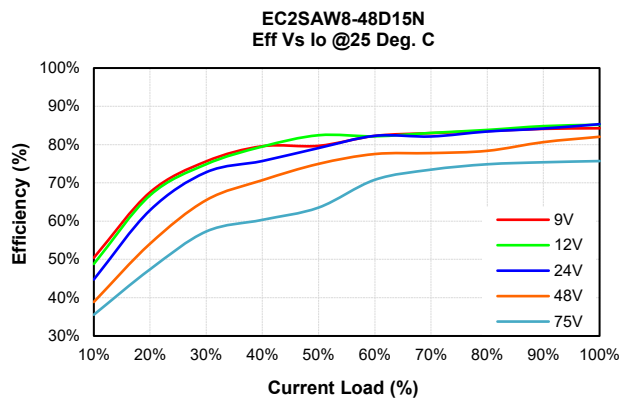



MECHANICAL SPECIFICATION

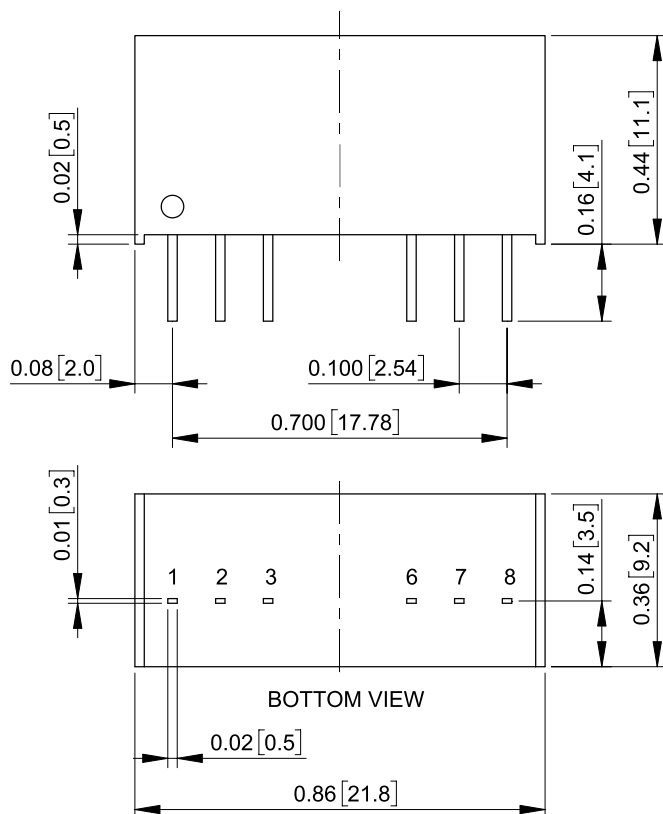

All Dimensions in Inches[mm]

Tolerance Inches: x.xx=±0.02, x.xxx=±0.010

Millimeters: x.x=±0.5, x.xx=±0.25

Pin Connection

Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	On/Off	On/Off
6	+V Output	+V Output
7	-V Output	Common
8	NC	-V Output

Note: Pin Size is x.xx±0.002 Inch [x.x±0.05 mm]

NC-No Connection with Pin