



electronicpowersolutions

120 Watt 11001 Series, Desktop, 24 Volt Single Output


- Universal Input
- 3 Pole IEC Inlet With Earth
- Full Approvals UL/cUL/TUV/CE/CB
- 100% Burn In & Tested
- Protection : Short Circuit / Over Load / Over Voltage
- CEC Compliant
- 1 Year Warranty



Specification

Input Voltage..... 90~264 VAC, 47~63 Hz
 Output Voltage..... 24 Volt DC Output
 Output Power 120 Watts Maximum
 Over Load Protection..... 110~150% rated output min, auto recovery
 Over Voltage Protection..... 150% of rated output voltage
 Hold Up Time..... $\geq 10\text{ms}$
 Efficiency..... $\geq 87\%$
 Operating Temperature..... 0 °C to +40 °C
 Storage Temperature..... -20 to +85 °C
 Isolation..... I/P-O/P: 3 kVAC,
 EMC..... EN55022, CISPR 22, Class B
 EN61000-4-2,3,4,5,
 Safety Approvals..... UL/CUL UL60950, UL60065, TUV/GS, EN/IEC60950,
 EN/IEC60065, CB, DoIR+C-Tick, CE, PSE, EK, PSB, FCC, CCC
 Input Connector..... 3 pin IEC Inlet(IEC 320-C14)
 Output Connector..... Standard 2.5mm Positive Centre Bore
 (Options of other alternatives available)
 Output Lead Length..... Typically 1200mm,
 Output Lead Gauge..... 16#
 Case Size..... 137(L) x 59(W) x 34(H) mm
 AC Mains Leads..... Also available from ALL PSU Ltd
 UK, Euro, USA (Black 2 Metres Long)

Model	Output Voltage	Output Current	Ripple & Noise
EA-11001-F-240	24 Volts	5 Amps	480mV

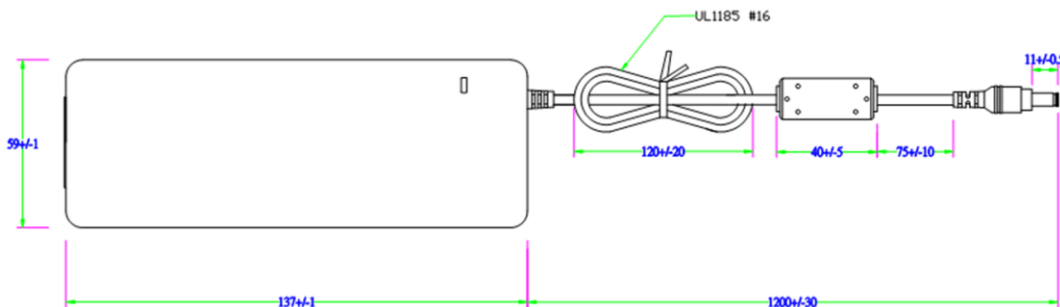

ALL PSU LTD

Unit D6 Laser Quay | Culpeper Close | Medway City Estate | Rochester | Kent | ME2 4HU

Tel : 01634 725527 | Fax : 01634 739111

Email : sales@allpsu.co.uk | Web : www.allpsu.co.uk